

Kingsrose Announces Near Surface High-Grade Gold at the Maul Vein, Way Linggo Project

Kingsrose Mining Limited (ASX: KRM) (“Kingsrose” or the “Company”) is pleased to announce high-grade gold intercepts from drilling on the Maul Vein target at the Way Linggo project, Indonesia (Figure 1 and Table 1). Between November and December 2021, five holes for a total of 816.7 metres were completed (Figure 2 and Table 2) to follow up on encouraging trench results and geological interpretations announced on 1st November 2021.

Highlights

- Significant downhole intercepts include:
 - **3.1 metres at 13.0 g/t gold**, 21.9 g/t silver (from 78.2 metres, DDH-597)
 - **4.3 metres at 6.0 g/t gold**, 8.6 g/t silver (from 41.2 metres, DDH-596)
 - **2.7 metres at 6.7 g/t gold**, 8.9 g/t silver (from 8.1 metres, DDH-595)
- Gold grades up to 25.1 g/t over 0.7 metres (from 78.2 metres, DDH-597) are evidence of high-grade mineralising events present within the vein system and indicates potential to vector toward thicker high-grade zones.
- A sub-parallel gold mineralised vein which is blind at surface was intercepted 25 metres to the north of the Maul Vein, termed the Semung Besar Vein, as such the area is shown to host multiple veins within the same structural corridor.
- Mineralisation is located 500 metres west of the 240,000 oz gold Mineral Resource at Talang Santo (refer ASX announcement dated 10 August 2021) and is open both along strike and down dip.
- Kingsrose is commencing a strategic process to review opportunities to divest all or part of the Way Linggo project to maximise the value of the Company’s interest in the project for the benefit of all shareholders and pursue its discovery focused strategy.

Fabian Baker, Kingsrose Managing Director, commented “*The first five holes from the Maul Vein have discovered gold mineralisation from surface in two sub-parallel structures, which is encouraging for the potential of the area.*”

Mineralisation remains open and is located 500 metres west of the 240koz gold Talang Santo Mineral Resource, which is also open down plunge. Follow-up drilling is planned to commence at the end of January to target depth extensions of the Maul and Semung Besar veins.

Despite these encouraging results, our strategy, and our team’s strength, is value creation through discovery. As the scale of existing resources at Way Linggo do not meet our development threshold, we are assessing divestment opportunities to realise value through a balanced transaction that further funds this strategy while retaining exposure to future cash flow from production.”

Maul Vein Drilling Results

Five, shallow diamond drill holes totalling 816.7 metres were completed (Table 2) along a 160 metre strike at the Maul Vein (Figures 2 and 3), to test the down dip continuity of the vein exposed in surface trenching (refer ASX announcement dated 1 November 2021). The deepest hole was 241.9 metres.

Drilling intercepted two sub-parallel gold bearing vein zones, the Maul Vein to the south and the newly identified Semung Besar vein 25 metres to the north. The Maul Vein was identified by mapping and trenching, and the Semung Besar vein is blind at surface, concealed beneath thin alluvial cover. Trenching has shown the Maul Vein to occur over at least 300 metres of strike at surface and is open along strike.

This initial drill program has confirmed the down dip continuity of the Maul Vein to at least 120 metres below surface along a strike length of 160 metres, as well as proving that the vein is host to high-grade gold and silver mineralisation (Table 1 and Appendix 2). Within the mineralised intercepts, narrow high grades were intercepted, for example:

- **0.7 metres at 25.1 g/t gold**, 61.5 g/t silver (from 78.2 metres, DDH-597)
- **0.6 metres at 12.8 g/t gold**, 13.4 g/t silver (from 10.2 metres, DDH-595)
- **1.0 metre at 9.7 g/t gold**, 9.0 g/t silver (from 41.6 metres, DDH-596)

Vein zones are typically between 2 and 15 metres apparent thickness and dip between 60° and 75° to the northeast, containing mineralised intervals >1 g/t gold of one to five metres apparent thickness.

Mineralisation remains open both along strike and down dip, and two drill holes totalling approximately 500 metres are scheduled to commence in late January targeting depth extensions to the Maul and Semung Besar veins.

Commencement of Strategic Review of the Way Linggo Project

Kingsrose's strategic direction is the creation of value for its shareholders by discovery and responsible development of mineral deposits with Tier-1 potential, as demonstrated by the recent acquisition of promising exploration projects in Scandinavia. Although past production at the Way Linggo project was highly profitable at times, the current Mineral Resources do not meet economic thresholds required to realise the Company's strategy. The project area has good exploration potential however the targets identified to date are regarded as high-risk.

Therefore, Kingsrose is commencing a process to seek opportunities to divest all or part of the Way Linggo project to maximise the value of the Company's interest in the project for the benefit of all shareholders. The intention is to identify a transaction that allows Kingsrose to reduce its holding cost exposure and to add to the Company's treasury, while retaining exposure to future production cash flow and further discoveries at Way Linggo. Any potential transaction will be subject to any required shareholder and regulatory approvals.

Any discussions with counterparties will remain incomplete and confidential until the process has concluded and there can be no certainty any transaction will be agreed. The Company shall keep the market informed of any developments with respect to this process in due course in accordance with its continuous disclosure obligations.

TABLE 1: Significant drill intercepts.

Hole ID	From (m)	Interval ² (m)	Au (g/t)	Ag (g/t)	Vein Interpretation
DDH-595	8.10	2.70	6.65	8.87	Semung Besar
	14.75	1.25	1.58	1.44	
	66.20	0.65	5.58	6.07	
DDH-596 ³	32.80	1.60	1.83	2.59	Semung Besar
	37.10	0.70	4.95	2.90	
	41.20	4.30	5.99	8.59	
DDH-597 ⁴	78.15	3.05	13.03	21.92	Maul
DDH-598 ⁵	150.20	5.70	1.87	11.08	Maul
DDH-599	109.20	1.00	4.33	9.70	Semung Besar
	143.40	1.05	4.42	8.13	Maul
Notes: <ol style="list-style-type: none"> Significant intercepts were calculated using a 1.0 g/t gold lower cut-off Downhole interval is reported, due to the early stage of exploration and lack of detailed structural data, it is not possible to estimate true widths No significant intercept of the Maul Vein in DDH-596 The Semung Besar Vein has been eroded and was not intercepted in DDH-597 No significant intercept of the Semung Besar Vein in DDH-598 					

TABLE 2: Drill hole collar data.

Hole ID	Easting	Northing	Elevation (m)	Inclination (°)	Azimuth (°)	Length (m)
DDH-595	432542	9425373	1266	-60	210	125.1
DDH-596	432482	9425438	1272	-50	210	134.7
DDH-597	432612	9425333	1266	-60	210	115.1
DDH-598	432554	9425481	1292	-60	210	241.9
DDH-599	432615	9425427	1281	-50	210	199.9

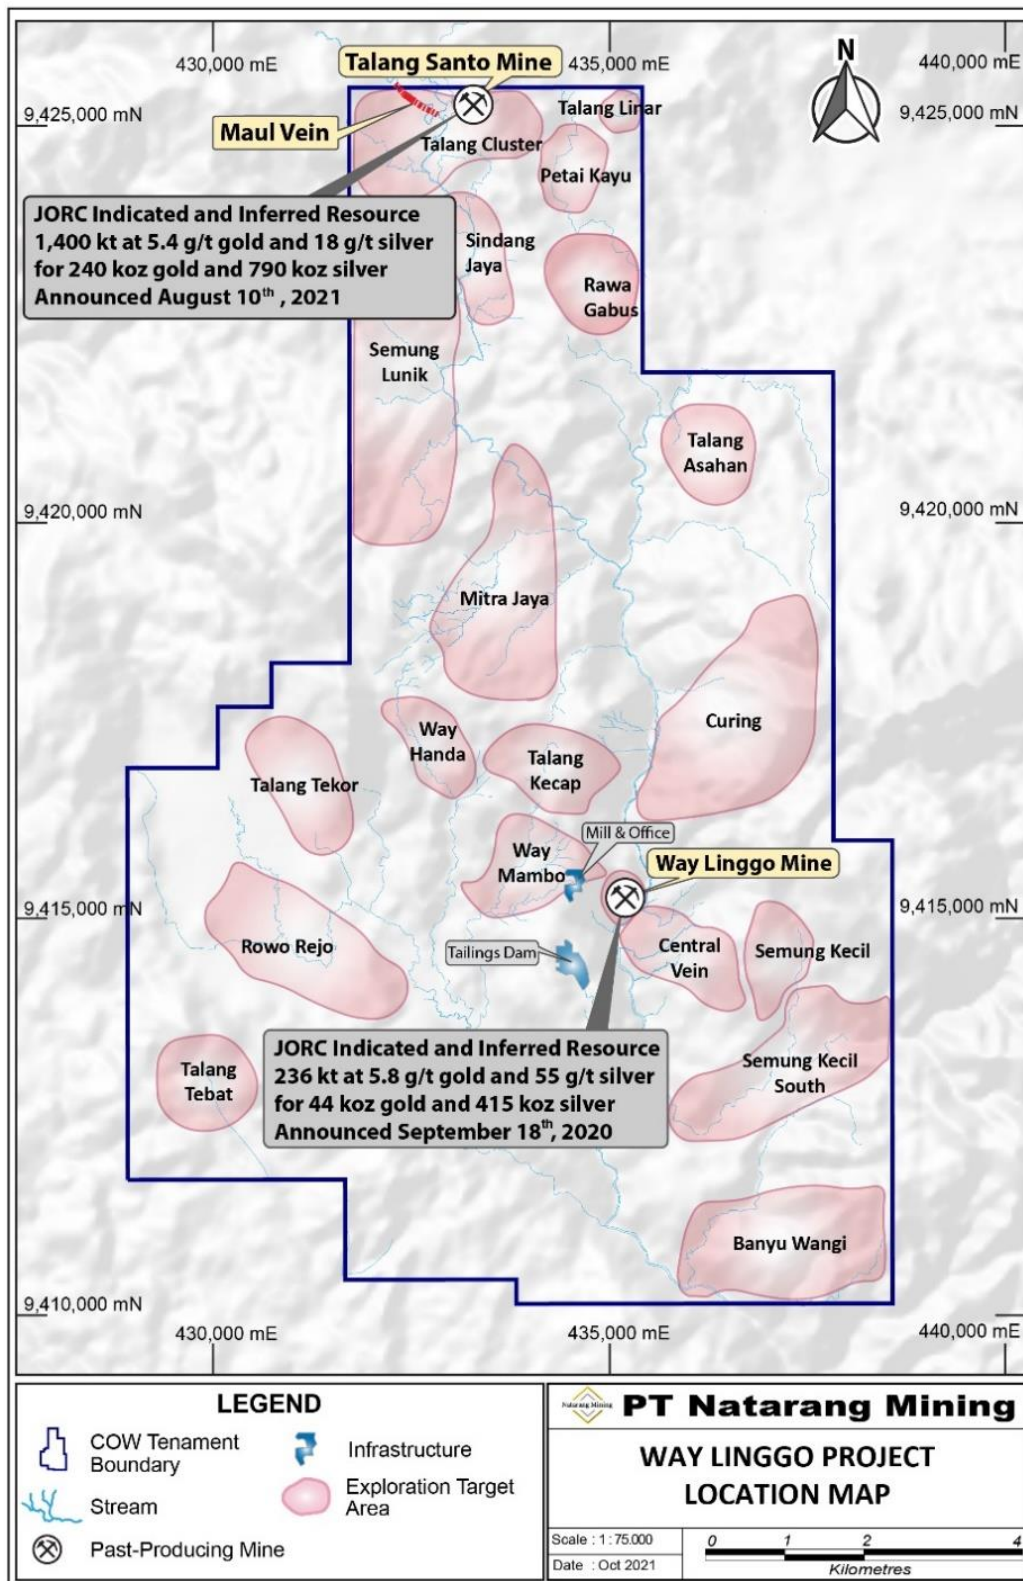


FIGURE 1: Map showing exploration prospects and past-producing mines within the Way Linggo project.

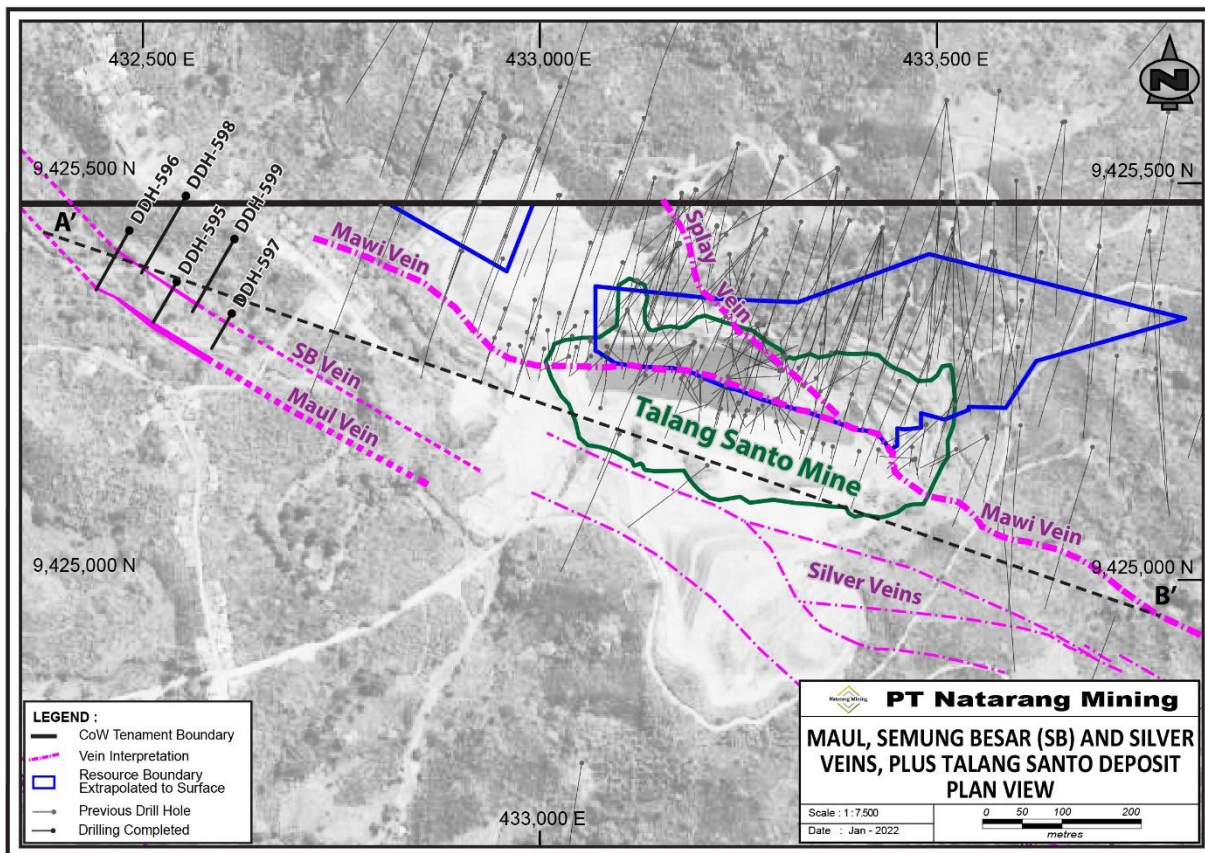


FIGURE 2: Drill collar locations at the Maul and Semung Besar (“SB”) veins, located 500 metres west of the Talang Santo mine.

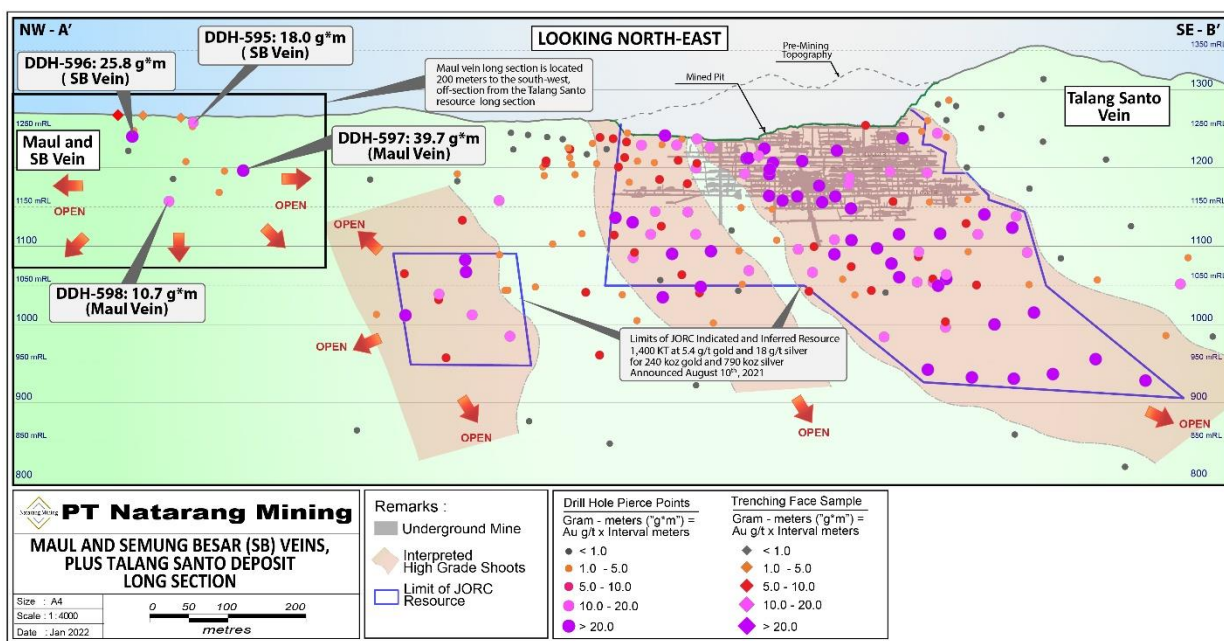


FIGURE 3: Long section showing the Maul Vein relative to the Talang Santo Mineral Resource and mine.

-ENDS-

For more information please contact:

Fabian Baker
Managing Director
+61 8 9389 4494
info@kingsrosemining.com

This announcement has been authorised for release to the ASX by the Board.

For further information regarding the Company and its projects please visit www.kingsrosemining.com

About Kingsrose Mining Limited

Kingsrose Mining Limited is an ASX-listed mining and mineral exploration company. Following ceasing production at its Way Linggo mine in Indonesia, having produced over 200koz gold and 1.5MOz silver, in 2021 the Company commenced a new discovery-focused strategy targeting the acquisition and exploration of new mineral deposits. Kingsrose has acquired exploration projects in Finland and Norway and is currently conducting regional exploration around the former mines at Way Linggo.

Forward-looking statements

This announcement includes forward-looking statements, including forward looking statements relating to the future operation of the Company. These forward-looking statements are based on the Company's expectations and beliefs concerning future events. Forward-looking statements are necessarily subject to risks, uncertainties and other factors, many of which are outside the control of the Company, which could cause actual results to differ materially from such statements. The Company makes no undertaking to subsequently update or revise the forward-looking statements made in this announcement to reflect the circumstances or events after the date of this announcement.

You are strongly cautioned not to place undue reliance on forward-looking statements, particularly in light of the current economic climate and the significant volatility, uncertainty and disruption caused by COVID-19.

Competent Persons Statement

The information in this report that relates to Exploration Results is based on information compiled under the supervision of Dr Michael Andrews, who is a Fellow of the Australasian Institute of Mining and Metallurgy and a Director and Substantial Shareholder of Kingsrose Mining Limited. Dr Andrews has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves." Dr Andrews consents to the inclusion in this report of the matter based on his information in the form and context in which it appears.

APPENDIX 1

JORC CODE, 2012 EDITION – TABLE 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> This Table 1 relates to sampling by diamond drilling, soil auger, rock chip and channel sampling. Diamond drilling and channel sampling sample intervals are designed to honor geological boundaries. Core is aligned and measured by tape, referenced to downhole core blocks. Diamond drilling and Channel sampling are completed to industry standard using various sampling intervals (0.1m to 1.5m) dominated by geological constraints (e.g. Rock types, veining and alteration/sulphidation). Rock chip samples are collected by hand using a rock hammer with multiple pieces of rock collected at one location for each sample. Channel samples are collected by hand using a rock hammer with multiple pieces of rock collected from left to right across the channel sample interval. Soil Samples are collected by hand drilling with an auger to the C-horizon. Only C-horizon material is sampled. Soil, Rock chip and Channel sample locations are picked up by a handheld GPS with tape and bearing measurements used where required. Sample rock types and alteration were recorded where the rock and alteration was identifiable. Soil, Rock chip and Channel samples are collected directly from the rock. Samples were collected damp with natural moisture. Soil, Rock chip and Channel samples are inherently variable and do not accurately represent the average grade of the surrounding rock. Soil, Rock chip and Channel samples are used as a non- quantitative guide for assessing prospectivity hence are regarded as suitable for this purpose.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Diamond drill core. Several core sizes are used: NQ (47.6mm nominal core diameter). HQ (63.5mm nominal core diameter). PQ (85.0mm nominal core diameter). Core is not orientated.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. 	<ul style="list-style-type: none"> Diamond drill recoveries are recorded as a percentage of measured core against downhole drilled intervals. Achieved ≈90% recoveries. Standard drilling practice used to ensure maximum core recoveries. A documented relationship between core recoveries and grade has not yet been established although core loss occurred in some

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p>of the high-grade intersections due to the friable nature of the vein material.</p> <ul style="list-style-type: none"> Rock chip and channel sampling is taken from an in-situ outcrop or trench into a sample bag using a standard geological hammer according to typical industry practice. Soil sampling is taken from the in-situ soil C-horizon with hand drill auger according to typical industry practice.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Core logging is conducted by PT. Natarang Mining ("PTNM") geologists, who delineate intervals on geological, structural, alteration and/or mineralogical boundaries, to industry standard. Core logging is qualitative and all core is photographed. Rock types, veining and alteration/sulphidation are all recorded. 100% of drill core is logged. Soil Rock Chip and Channel sampling is conducted by PTNM geologists, logging is qualitative and all Rock Chip and Channel sampling is photographed. Rock types, veining and alteration/sulphidation are all recorded. 100% of Soil, Rock Chip and Channel sampling is logged.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Core is cut by diamond saw and half core used for sampling, the remaining half is archived. For gouge, soft and friable core a manual knife (or similar device) is used to approximately halve the core. Rock chip samples are collected by hand using a rock hammer with multiple pieces of rock collected at one location for each sample. Samples were collected damp with natural moisture. Channel samples are nominally chipped horizontally from left to right across the outcrop or trench, subset by geological features. Sample collection is manual via a geological hammer. Samples were collected damp with natural moisture. Soil samples are collected by manual hand drill auger to the in-situ soil C-horizon. Samples were collected damp with natural moisture. Diamond drilling, Rock chip and Channel samples are crushed and pulverised to create a 30g charge for fire assay lead collection followed by flame atomic adsorption spectrometry. Analysis for silver is via gamma ray spectrometry. The nature, quality and appropriateness of the sample preparation technique is typical for mineralisation of this type and is deemed adequate. Duplicate samples are not routinely sampled. The Competent Person is not aware of any work taken to maximise the representivity of the sample. The sample size far exceeds the grain size of the precious metals, which are generally microscopic. Sample sizes are appropriate.
Quality of assay data and	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures 	<ul style="list-style-type: none"> Gold concentration in diamond drilling, soil, rock chip and channel samples is determined by fire assay: fusion with lead collection, aqua regia prill digestion,

Criteria	JORC Code explanation	Commentary
laboratory tests	<p>used and whether the technique is considered partial or total.</p> <ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<p>followed by atomic absorption spectrometry (AAS). Analysis for silver in diamond drilling is acid digestion of sample pulp followed by inductively coupled plasma optical emission spectrometry (ICPOES). - Gold and silver concentrations in historical Rock chip samples was determined by aqua regia digestion with an AAS finish. Analysis is considered total for fire assay and near total for all other assay types of both silver and gold. Accordingly, no treatment (i.e. factoring or similar) has been performed to the raw assay to allow for incomplete digestion, if any.</p> <ul style="list-style-type: none"> Geophysical tools etc are not applicable to this report. None used. The QAQC protocols used include the following: Commercial blanks are used at an incidence of 1 per fire assay batch, with a batch consisting of a maximum of 42 samples and a minimum of 20 samples. Commercial standards are used at an incidence of 2 per fire assay batch, with a batch consisting of a maximum of 42 samples and a minimum of 20 samples. Drill core coarse duplicates and drill core pulp duplicates are chosen to represent the general resource gold grade distribution and approximately 5% total sent for re-assay at Pt Geoservices laboratory. Drill core coarse duplicates are sent to an external laboratory, PT Intertek Utama Services, at an incidence of 1 in 25 samples. Regular QAQC data reviews have established sample assay accuracy and a lack of bias.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Significant intersections were reviewed by senior exploration geology managers from PTNM and by Kingsrose Mining Limited ("KRM") personnel. Twinned holes have not been used to date. Data is manually checked by PTNM staff geologists prior to input into excel for transfer to MS Access and SQL databases. Data is also electronically checked in 3-dimesional software and appropriate exploration/mining validation software. The main SQL back end database is password controlled with access limited to key senior staff only. Hard copies of Diamond core sampling, Soil, Rock chip and channel sampling, log sheets, surveys and assay results are stored on site. No adjustment is made to any assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drillhole collars are surveyed using industry standard survey techniques and equipment. Drillholes have been downhole surveyed with digital downhole camera at average 50 metre intervals. Soil, rock chip and channel sample locations were recorded using a handheld GPS. Elevation values were in AHD RL and values recorded within the database. Expected accuracy is + or – 5m for easting, northing and 10m for elevation coordinates.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> Channel samples are georeferenced by the geologist using the assistance of handheld GPS sample collar pickups and where necessary tape measure and bearing. The Universal Transverse Mercator (UTM) system is used. No local grid system is used for exploration data. For general use remote sensing data and airborne radar data with the incorporation of local scale topographic surfaces, collected by the site survey team, is used.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Exploration result data spacing can be highly variable, as little as 5m and up to 100m. Data spacing and distribution is considered sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource estimation and classifications applied. Sampling is based on geological intervals. Compositing is not applied until estimation stage
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> The orientation of the vein system is known, and drilling intercept angles are generally of suitable orientation to the vein system to provide unbiased sampling results. Channel samples are collected perpendicular to the strike of mineralised structures. Rockchip samples are collected from individual points within a mineralised structure. Soil samples are collected on lines across the known mineralised trend to reduce bias.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples retrieved from drilling are stored securely in a locked facility patrolled by onsite security. Samples are then logged, cut and stored in numbered sample bags for transported by PTNM employees to the ISO17025 accredited PT. Geoservices Geo-assay Jakarta Laboratory. Samples retrieved from soil, rock chip and channel sampling are stored securely in a locked facility patrolled by onsite security. Samples are logged in the field then stored in numbered sample bags for transported by PTNM employees to the ISO17025 accredited PT. Geoservices Geo-assay Jakarta Laboratory
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> PTNM has worked with various independent consultants to design its drilling and sampling methodologies and continually reviews and improves its processes and procedures

Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Tenure is occasioned via a fourth generation Contract of Work (CoW) held by PTNM. PTNM is 85 per cent owned by KRM with the remaining 15 per cent interest held by an Indonesian national. The mine, mill and camp area were established within a mixed agricultural and protected forest setting. With the suspension of mining operations the mill has been placed on care and maintenance. Standard Indonesian divestment provisions exist against the COW. KRM is obliged to pay royalties to various parties on its production, including government royalties of 3.75 per cent and 3.25 per cent of gold and silver bullion values, respectively. The corporate structure, divestment provisions and royalty obligation are described in detail in the company's annual report. The COW is currently valid till 2034, with an option to apply for two extension periods of ten years each, subject to meeting certain requirements under the mining law. The mine was recently operating. The mill was recently operating. Community relations are cordial. There are no known impediments to continued operation.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> All exploration at the Way Linggo Project has been completed by PTNM.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Way Linggo project lies in the trans Sumatran fault fore-arc to intra-arc and is classified as low sulphidation epithermal quartz vein gold and silver deposits. The Maul Vein is a >300 metre long zone of two sub-parallel low sulphidation epithermal, fault hosted vein zones. Each vein varies between 1 and 5 metres apparent thickness, striking WNW-ESE and dipping between 60° and 75° NE. The two veins (Maul and Semung Besar) are approximately 25 metres apart. Drilling has shown the veins extend to at least 120 metres below surface and are open in all directions. Veins are composed of chalcedonic, banded and brecciated quartz in the near surface levels, with weak ginguero banding and a greater proportion of crystalline banded quartz observed in deeper intercepts. Host rocks comprise andesitic volcanics, which are partially unconformably overlain by late, post mineral colluvial and alluvial material which completely obscures the Semung Besar vein. Moderate chlorite, silica, clay and hematite alteration occurs as a selvage to the mineralised veins.

Criteria	JORC Code explanation	Commentary
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> See Tables 1 and 2 of the news release
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Gold and silver grades for reported intervals summarised in Table 1 are calculated by interval length weighted averaging. Metal Equivalent grades are not stated
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Intervals reported here are downhole lengths. True widths are not known. <ul style="list-style-type: none"> The geometry of the Maul Vein system is known and drill hole are oriented approximately perpendicular to the strike of the mineralised system
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Included as figures 1 to 3 within the news release.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be 	<ul style="list-style-type: none"> See Table 1 and Appendix 2

Criteria	JORC Code explanation	Commentary
	practiced to avoid misleading reporting of Exploration Results.	
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> No other exploration information is being presented in this release.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Follow up work will include two drill holes for a total of approximately 700 metres to explore for depth extensions to the Maul and Semung Besar veins, and is scheduled to commence in late January.

Appendix 2 – Drilling Data

Maul Vein Drill Data

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-595	4.2	4.7	0.5	DC141954	2.65	2.2
DDH-595	7.1	8.1	1.0	DC141901	0.17	0.9
DDH-595	8.1	8.4	0.3	DC141902	1.19	1.6
DDH-595	8.4	8.6	0.3	DC141903	3.13	5.5
DDH-595	8.6	9.2	0.6	DC141904	11.76	9.2
DDH-595	9.2	9.6	0.4	DC141905	0.49	4.5
DDH-595	9.6	9.9	0.4	DC141906	0.10	12.6
DDH-595	9.9	10.2	0.3	DC141907	6.35	8.8
DDH-595	10.2	10.8	0.6	DC141908	12.83	13.4
DDH-595	10.8	11.3	0.4	DC141909	0.18	2.1
DDH-595	11.3	12.3	1.0	DC141910	0.05	1.5
DDH-595	12.3	13.3	1.0	DC141911	0.05	1.5
DDH-595	13.3	14.3	1.0	DC141912	0.07	0.6
DDH-595	14.3	14.8	0.5	DC141913	0.03	0.5
DDH-595	14.8	15.1	0.4	DC141914	2.17	1.7
DDH-595	15.1	15.6	0.5	DC141915	1.56	1.6
DDH-595	15.6	16.0	0.4	DC141916	1.09	1.0
DDH-595	16.0	16.3	0.3	DC141917	0.47	0.7
DDH-595	16.3	16.8	0.5	DC141918	0.70	1.3
DDH-595	16.8	17.6	0.8	DC141919	0.04	0.6
DDH-595	17.6	18.6	1.0	DC141920	0.04	0.4
DDH-595	18.6	18.9	0.3	DC141921	0.05	0.4
DDH-595	18.9	19.9	1.0	DC141922	0.02	1.0
DDH-595	19.9	20.5	0.6	DC141923	0.02	4.7
DDH-595	20.5	21.5	1.0	DC141924	0.01	1.1
DDH-595	27.0	28.0	1.0	DC141925	0.16	0.4
DDH-595	28.0	29.0	1.0	DC141926	0.12	0.4
DDH-595	38.9	39.9	1.0	DC141927	0.02	0.2
DDH-595	43.7	44.6	0.9	DC141928	-0.01	0.5
DDH-595	44.6	44.8	0.2	DC141929	-0.01	0.2
DDH-595	44.8	45.9	1.1	DC141930	-0.01	0.3
DDH-595	63.2	64.2	1.0	DC141931	-0.01	0.9
DDH-595	64.2	65.2	1.0	DC141932	0.01	0.4
DDH-595	65.2	66.2	1.0	DC141933	0.17	4.5

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-595	66.2	66.4	0.2	DC141934	2.96	6.0
DDH-595	66.4	66.9	0.4	DC141935	6.75	6.1
DDH-595	66.9	67.2	0.3	DC141936	0.48	2.5
DDH-595	67.2	67.6	0.4	DC141937	0.71	2.2
DDH-595	67.6	67.9	0.3	DC141938	0.16	3.9
DDH-595	67.9	68.0	0.2	DC141939	0.06	4.6
DDH-595	68.0	68.2	0.2	DC141940	0.06	7.4
DDH-595	68.2	68.4	0.2	DC141941	0.14	4.7
DDH-595	68.4	68.7	0.3	DC141942	0.22	2.6
DDH-595	68.7	69.0	0.3	DC141943	0.22	6.0
DDH-595	69.0	69.7	0.7	DC141944	0.39	3.5
DDH-595	69.7	70.5	0.8	DC141945	0.17	3.4
DDH-595	70.5	70.7	0.2	DC141946	0.95	31.4
DDH-595	70.7	70.9	0.2	DC141947	0.09	5.8
DDH-595	70.9	71.1	0.2	DC141948	0.26	15.2
DDH-595	71.1	71.3	0.2	DC141949	0.37	6.3
DDH-595	71.3	71.6	0.3	DC141950	0.39	6.1
DDH-595	71.6	71.8	0.2	DC141951	0.51	4.0
DDH-595	71.8	72.8	1.0	DC141952	0.03	0.8
DDH-595	72.8	73.8	1.0	DC141953	-0.01	1.4
DDH-595	99.8	100.8	1.0	DC141955	0.02	0.3
DDH-595	100.8	101.1	0.3	DC141956	-0.01	0.3
DDH-595	101.1	102.1	1.0	DC141957	-0.01	0.7
DDH-596	8.2	9.2	1.0	DC141958	-0.01	0.8
DDH-596	9.2	10.9	1.7	DC141959	-0.01	0.4
DDH-596	10.9	11.2	0.3	DC141960	0.02	0.4
DDH-596	11.2	11.5	0.3	DC141961	0.05	2.0
DDH-596	11.5	12.5	1.0	DC141962	-0.01	0.2
DDH-596	19.5	20.5	1.0	DC141963	-0.01	0.2
DDH-596	20.5	20.8	0.3	DC141964	0.03	1.2
DDH-596	20.8	21.0	0.3	DC141965	0.05	3.2
DDH-596	21.0	21.4	0.4	DC141966	0.07	0.3
DDH-596	21.4	21.8	0.4	DC141967	0.11	1.0
DDH-596	21.8	22.3	0.5	DC141968	0.31	0.6
DDH-596	22.3	22.6	0.3	DC141969	0.17	0.4
DDH-596	22.6	23.1	0.5	DC141970	0.17	0.3
DDH-596	23.1	23.3	0.2	DC141971	0.16	1.1
DDH-596	23.3	24.2	0.9	DC141972	0.57	0.4

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-596	24.2	25.0	0.8	DC141973	0.06	0.4
DDH-596	25.0	25.3	0.3	DC141974	0.05	0.5
DDH-596	25.3	26.0	0.8	DC141975	0.01	0.5
DDH-596	26.0	26.9	0.9	DC141976	-0.01	0.4
DDH-596	26.9	27.2	0.3	DC141977	0.09	1.6
DDH-596	27.2	27.7	0.5	DC141978	0.01	0.3
DDH-596	27.7	28.7	1.0	DC141979	0.02	0.6
DDH-596	28.7	29.5	0.8	DC141980	0.06	0.4
DDH-596	29.5	29.8	0.3	DC141981	0.02	0.3
DDH-596	29.8	30.8	1.0	DC141982	0.03	-0.2
DDH-596	30.8	31.8	1.0	DC141983	0.03	0.7
DDH-596	31.8	32.2	0.4	DC141984	0.24	1.1
DDH-596	32.2	32.8	0.6	DC141985	0.20	4.5
DDH-596	32.8	33.4	0.6	DC141986	2.28	2.9
DDH-596	33.4	33.8	0.4	DC141987	1.22	2.3
DDH-596	33.8	34.1	0.4	DC141988	1.28	2.1
DDH-596	34.1	34.4	0.3	DC141989	2.26	2.9
DDH-596	34.4	35.4	1.0	DC141990	0.07	3.1
DDH-596	35.4	36.0	0.6	DC141991	0.23	1.6
DDH-596	36.0	36.4	0.4	DC141992	0.25	1.1
DDH-596	36.4	36.8	0.4	DC141993	0.94	2.1
DDH-596	36.8	37.1	0.3	DC141994	0.19	7.7
DDH-596	37.1	37.8	0.7	DC141995	4.95	2.9
DDH-596	37.8	38.2	0.4	DC141996	0.24	2.1
DDH-596	38.2	38.9	0.7	DC141997	0.23	3.3
DDH-596	38.9	39.1	0.3	DC141998	0.29	3.4
DDH-596	39.1	39.5	0.4	DC141999	0.19	1.4
DDH-596	39.5	39.9	0.4	DC142000	0.34	0.8
DDH-596	39.9	40.9	1.0	DC144151	0.17	0.8
DDH-596	40.9	41.2	0.3	DC144152	0.89	5.2
DDH-596	41.2	41.6	0.4	DC144153	3.65	30.4
DDH-596	41.6	42.0	0.4	DC144154	9.05	8.6
DDH-596	42.0	42.2	0.2	DC144155	10.58	8.7
DDH-596	42.2	42.6	0.3	DC144156	9.98	9.6
DDH-596	42.6	42.9	0.4	DC144157	3.55	2.6
DDH-596	42.9	43.3	0.4	DC144158	9.60	10.0
DDH-596	43.3	43.6	0.3	DC144159	6.38	10.6
DDH-596	43.6	43.8	0.2	DC144160	6.06	5.5

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-596	43.8	44.1	0.3	DC144161	6.81	6.0
DDH-596	44.1	44.5	0.4	DC144162	4.63	4.6
DDH-596	44.5	45.1	0.6	DC144163	3.97	3.9
DDH-596	45.1	45.5	0.4	DC144164	1.45	2.7
DDH-596	45.5	46.5	1.0	DC144165	0.41	6.9
DDH-596	46.5	47.4	0.9	DC144166	0.93	4.8
DDH-596	47.4	48.4	1.0	DC144167	0.07	0.5
DDH-596	48.4	49.4	1.0	DC144168	0.03	0.3
DDH-596	49.4	49.7	0.4	DC144169	0.05	0.3
DDH-596	49.7	50.7	1.0	DC144170	0.03	0.4
DDH-596	50.7	51.7	1.0	DC144171	0.03	0.2
DDH-596	53.0	54.0	1.0	DC144172	-0.01	0.4
DDH-596	54.0	55.0	1.0	DC144173	0.02	0.2
DDH-596	55.0	56.0	1.0	DC144174	0.02	0.3
DDH-596	56.0	57.0	1.0	DC144175	0.03	0.6
DDH-596	57.0	57.6	0.6	DC144176	0.04	0.3
DDH-596	57.6	58.2	0.6	DC144177	0.62	1.1
DDH-596	58.2	58.6	0.4	DC144178	0.18	0.4
DDH-596	58.6	59.4	0.8	DC144179	0.14	0.5
DDH-596	59.4	60.1	0.7	DC144180	0.02	0.3
DDH-596	60.1	61.0	0.9	DC144181	0.03	0.3
DDH-596	61.0	62.0	1.0	DC144182	0.05	0.2
DDH-596	62.0	63.0	1.0	DC144183	0.02	0.4
DDH-596	63.0	64.0	1.0	DC144184	0.02	1.5
DDH-596	64.0	65.0	1.0	DC144185	0.02	0.4
DDH-596	65.0	66.0	1.0	DC144186	0.02	0.2
DDH-596	66.0	67.0	1.0	DC144187	0.05	1.0
DDH-596	67.0	67.2	0.2	DC144188	0.34	3.3
DDH-596	67.2	67.7	0.5	DC144189	1.20	1.5
DDH-596	67.7	68.1	0.4	DC144190	0.12	1.2
DDH-596	68.1	68.4	0.3	DC144191	0.06	3.6
DDH-596	68.4	68.6	0.2	DC144192	0.03	1.4
DDH-596	68.6	69.1	0.5	DC144193	0.02	4.3
DDH-596	69.1	69.4	0.3	DC144194	0.02	5.3
DDH-596	69.4	70.4	1.0	DC144195	-0.01	0.8
DDH-596	70.4	71.0	0.6	DC144196	-0.01	0.5
DDH-596	71.0	71.3	0.3	DC144197	0.46	2.8
DDH-596	71.3	71.8	0.5	DC144198	0.25	3.2

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-596	71.8	72.4	0.6	DC144199	0.24	2.9
DDH-596	72.4	72.6	0.3	DC144200	-0.01	0.3
DDH-596	72.6	73.4	0.8	DC144201	0.03	0.5
DDH-596	73.4	74.4	1.0	DC144202	-0.01	0.5
DDH-596	74.4	75.4	1.0	DC144203	-0.01	0.5
DDH-596	75.4	76.4	1.0	DC144204	-0.01	0.8
DDH-596	76.4	77.4	1.0	DC144205	-0.01	0.6
DDH-596	77.4	78.4	1.0	DC144206	-0.01	0.7
DDH-596	78.4	79.0	0.7	DC144207	-0.01	2.5
DDH-596	79.0	79.5	0.5	DC144208	-0.01	1.9
DDH-596	79.5	80.0	0.5	DC144209	0.03	0.9
DDH-596	80.0	80.3	0.3	DC144210	0.05	0.5
DDH-596	80.3	80.8	0.5	DC144211	-0.01	0.6
DDH-596	80.8	81.3	0.5	DC144212	0.04	3.5
DDH-596	81.3	81.8	0.5	DC144213	0.08	1.5
DDH-596	81.8	82.3	0.5	DC144214	0.08	3.3
DDH-596	82.3	83.3	1.0	DC144215	-0.01	5.7
DDH-596	83.3	84.3	1.0	DC144216	-0.01	0.5
DDH-596	84.3	85.3	1.0	DC144217	-0.01	1.4
DDH-596	85.3	85.6	0.3	DC144218	-0.01	0.9
DDH-596	85.6	86.6	1.0	DC144219	-0.01	0.3
DDH-596	129.9	130.9	1.0	DC144220	-0.01	0.5
DDH-596	130.9	131.2	0.3	DC144221	0.01	0.3
DDH-596	131.2	132.2	1.0	DC144222	-0.01	0.7
DDH-597	28.0	29.0	1.0	DC144223	-0.01	0.5
DDH-597	29.0	29.5	0.5	DC144224	0.03	1.1
DDH-597	29.5	30.0	0.5	DC144225	0.03	0.6
DDH-597	32.3	32.6	0.3	DC144226	-0.01	0.3
DDH-597	35.7	36.7	1.0	DC144227	-0.01	0.3
DDH-597	36.7	37.1	0.4	DC144228	0.21	0.5
DDH-597	37.1	38.1	1.0	DC144229	-0.01	0.3
DDH-597	38.1	39.1	1.0	DC144230	-0.01	0.5
DDH-597	39.1	39.7	0.6	DC144231	0.03	0.5
DDH-597	39.7	40.5	0.8	DC144232	-0.01	0.4
DDH-597	40.5	41.7	1.2	DC144233	-0.01	0.3
DDH-597	41.7	42.4	0.7	DC144234	-0.01	0.3
DDH-597	42.4	43.3	0.9	DC144235	0.01	0.3
DDH-597	43.3	44.4	1.1	DC144236	-0.01	0.3

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-597	44.4	45.4	1.0	DC144237	-0.01	0.3
DDH-597	45.4	45.8	0.4	DC144238	-0.01	0.4
DDH-597	45.8	46.8	1.0	DC144239	0.01	0.3
DDH-597	46.8	47.8	1.0	DC144240	-0.01	0.3
DDH-597	47.8	48.8	1.0	DC144241	0.03	0.2
DDH-597	48.8	49.8	1.0	DC144242	-0.01	0.5
DDH-597	49.8	50.8	1.0	DC144243	0.01	0.6
DDH-597	50.8	51.8	1.0	DC144244	0.02	0.4
DDH-597	51.8	52.8	1.0	DC144245	0.02	0.3
DDH-597	52.8	53.8	1.0	DC144246	-0.01	0.3
DDH-597	53.8	54.2	0.4	DC144247	-0.01	0.3
DDH-597	54.2	55.2	1.0	DC144248	0.05	0.3
DDH-597	55.2	56.2	1.0	DC144249	-0.01	0.3
DDH-597	56.2	57.2	1.0	DC144250	0.04	1.0
DDH-597	57.2	57.5	0.3	DC144251	0.06	1.1
DDH-597	57.5	58.0	0.5	DC144252	0.03	1.3
DDH-597	58.0	58.3	0.3	DC144253	0.02	0.8
DDH-597	58.3	58.5	0.2	DC144254	0.02	0.7
DDH-597	58.5	58.8	0.3	DC144255	0.05	1.1
DDH-597	58.8	59.1	0.3	DC144256	0.05	1.4
DDH-597	59.1	59.4	0.4	DC144257	0.03	0.8
DDH-597	59.4	59.9	0.5	DC144258	0.01	0.6
DDH-597	59.9	60.3	0.4	DC144259	0.01	0.8
DDH-597	60.3	60.6	0.4	DC144260	0.02	1.7
DDH-597	60.6	60.9	0.3	DC144261	0.01	0.5
DDH-597	60.9	61.9	1.0	DC144262	-0.01	0.4
DDH-597	61.9	62.9	1.0	DC144263	-0.01	0.6
DDH-597	62.9	63.9	1.0	DC144264	-0.01	0.3
DDH-597	63.9	64.9	1.0	DC144265	-0.01	0.4
DDH-597	64.9	65.5	0.5	DC144266	-0.01	0.4
DDH-597	65.5	66.5	1.0	DC144267	-0.01	0.4
DDH-597	66.5	67.5	1.0	DC144268	-0.01	0.2
DDH-597	67.5	68.5	1.0	DC144269	-0.01	0.6
DDH-597	68.5	69.5	1.0	DC144270	-0.01	0.3
DDH-597	69.5	70.5	1.0	DC144271	-0.01	0.5
DDH-597	70.5	71.0	0.5	DC144272	0.02	0.7
DDH-597	71.0	71.8	0.8	DC144273	0.01	2.1
DDH-597	71.8	72.1	0.3	DC144274	-0.01	0.6

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-597	72.1	72.4	0.3	DC144275	-0.01	0.3
DDH-597	72.4	72.7	0.3	DC144276	0.01	0.3
DDH-597	72.7	73.7	1.0	DC144277	0.02	0.2
DDH-597	73.7	74.7	1.0	DC144278	0.01	0.4
DDH-597	74.7	75.8	1.1	DC144279	0.01	0.3
DDH-597	75.8	76.1	0.3	DC144280	0.01	0.2
DDH-597	76.1	76.4	0.3	DC144281	0.02	0.5
DDH-597	76.4	77.4	1.0	DC144282	0.01	0.3
DDH-597	77.4	78.2	0.8	DC144283	0.03	0.4
DDH-597	78.2	78.4	0.2	DC144284	19.92	80.0
DDH-597	78.4	78.6	0.3	DC144285	32.65	77.0
DDH-597	78.6	78.9	0.3	DC144286	21.78	31.2
DDH-597	78.9	79.2	0.4	DC144287	5.94	9.8
DDH-597	79.2	79.4	0.2	DC144288	11.61	9.3
DDH-597	79.4	79.8	0.3	DC144289	3.79	8.1
DDH-597	79.8	80.2	0.5	DC144290	9.09	10.9
DDH-597	80.2	80.6	0.3	DC144291	26.14	20.7
DDH-597	80.6	80.9	0.4	DC144292	6.59	7.0
DDH-597	80.9	81.2	0.3	DC144293	2.90	3.6
DDH-597	81.2	81.8	0.6	DC144294	0.28	2.9
DDH-597	81.8	82.0	0.2	DC144295	0.07	2.7
DDH-597	82.0	82.6	0.5	DC144296	0.10	4.7
DDH-597	82.6	83.2	0.7	DC144297	0.04	0.9
DDH-597	83.2	83.8	0.6	DC144298	0.01	0.9
DDH-597	83.8	84.8	1.0	DC144299	0.02	1.8
DDH-597	84.8	85.2	0.4	DC144300	0.07	1.5
DDH-597	85.2	85.5	0.3	DC144301	0.06	1.1
DDH-597	85.5	85.7	0.3	DC144302	1.31	2.5
DDH-597	85.7	85.9	0.2	DC144303	0.28	0.7
DDH-597	85.9	86.2	0.3	DC144304	0.34	0.9
DDH-597	86.2	86.5	0.3	DC144305	0.62	1.5
DDH-597	86.5	86.7	0.2	DC144306	0.78	1.5
DDH-597	86.7	86.9	0.2	DC144307	0.10	2.2
DDH-597	86.9	87.3	0.4	DC144308	0.49	1.2
DDH-597	87.3	87.6	0.3	DC144309	0.64	1.8
DDH-597	87.6	87.9	0.3	DC144310	1.49	2.2
DDH-597	87.9	88.2	0.4	DC144311	1.23	2.6
DDH-597	88.2	88.5	0.3	DC144312	0.07	3.9

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-597	88.5	88.8	0.3	DC144313	0.33	0.9
DDH-597	88.8	89.1	0.3	DC144314	0.36	1.1
DDH-597	89.1	89.3	0.3	DC144315	0.20	1.0
DDH-597	89.3	89.6	0.3	DC144316	0.65	2.5
DDH-597	89.6	90.0	0.4	DC144317	0.07	2.1
DDH-597	90.0	90.3	0.3	DC144318	0.10	5.0
DDH-597	90.3	90.6	0.3	DC144319	0.05	4.0
DDH-597	90.6	90.9	0.3	DC144320	0.04	3.6
DDH-597	90.9	91.4	0.4	DC144321	0.08	2.1
DDH-597	91.4	91.6	0.2	DC144322	0.06	1.9
DDH-597	91.6	92.6	1.0	DC144323	0.08	4.3
DDH-597	92.6	92.9	0.3	DC144324	0.09	3.3
DDH-597	92.9	93.2	0.4	DC144325	0.14	4.6
DDH-597	93.2	93.6	0.3	DC144326	1.43	13.9
DDH-597	93.6	94.6	1.0	DC144327	0.02	3.9
DDH-597	94.6	95.3	0.8	DC144328	0.02	1.0
DDH-597	95.3	95.5	0.2	DC144329	0.04	2.9
DDH-597	95.5	96.5	1.0	DC144330	0.03	1.8
DDH-597	96.5	97.5	1.0	DC144331	0.01	1.3
DDH-597	104.0	105.0	1.0	DC144332	-0.01	0.6
DDH-597	105.0	106.0	1.0	DC144333	-0.01	11.5
DDH-597	106.0	107.0	1.0	DC144334	-0.01	4.0
DDH-597	107.0	108.0	1.0	DC144335	-0.01	1.6
DDH-597	111.0	112.0	1.0	DC144336	-0.01	2.4
DDH-598	37.0	38.0	1.0	DC144337	0.01	2.5
DDH-598	38.0	39.0	1.0	DC144338	0.01	3.3
DDH-598	39.0	40.0	1.0	DC144339	0.02	6.3
DDH-598	40.0	41.0	1.0	DC144340	0.02	5.1
DDH-598	41.0	42.0	1.0	DC144341	0.01	5.2
DDH-598	42.0	43.0	1.0	DC144342	0.02	5.5
DDH-598	43.0	44.0	1.0	DC144343	-0.01	30.4
DDH-598	44.0	45.0	1.0	DC144344	0.02	3.7
DDH-598	45.0	46.0	1.0	DC144345	0.02	4.1
DDH-598	46.0	47.0	1.0	DC144346	0.01	3.3
DDH-598	47.0	48.0	1.0	DC144347	0.02	19.7
DDH-598	48.0	49.0	1.0	DC144348	0.01	1.6
DDH-598	49.0	50.0	1.0	DC144349	0.02	1.4
DDH-598	50.0	51.0	1.0	DC144350	0.02	1.7

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-598	51.0	52.0	1.0	DC144351	0.02	0.3
DDH-598	52.0	53.0	1.0	DC144352	0.02	6.0
DDH-598	53.0	54.0	1.0	DC144353	0.01	1.6
DDH-598	54.0	55.0	1.0	DC144354	0.01	16.0
DDH-598	55.0	56.0	1.0	DC144355	0.01	6.6
DDH-598	56.0	57.0	1.0	DC144356	0.01	0.2
DDH-598	57.0	58.0	1.0	DC144357	-0.01	0.2
DDH-598	58.0	59.0	1.0	DC144358	0.01	3.4
DDH-598	59.0	60.0	1.0	DC144359	-0.01	1.3
DDH-598	60.0	61.0	1.0	DC144360	0.01	0.2
DDH-598	61.0	62.0	1.0	DC144361	0.02	2.3
DDH-598	62.0	63.0	1.0	DC144362	0.01	4.3
DDH-598	63.0	64.0	1.0	DC144363	-0.01	7.0
DDH-598	74.0	75.0	1.0	DC144364	-0.01	16.9
DDH-598	75.0	76.0	1.0	DC144365	-0.01	3.2
DDH-598	76.0	77.0	1.0	DC144366	0.01	1.6
DDH-598	77.0	78.0	1.0	DC144367	-0.01	0.2
DDH-598	78.0	79.0	1.0	DC144368	0.01	7.1
DDH-598	91.1	92.1	1.0	DC144369	0.01	0.4
DDH-598	92.1	92.5	0.4	DC144370	-0.01	4.4
DDH-598	92.5	93.5	1.0	DC144371	-0.01	1.8
DDH-598	93.5	94.5	1.0	DC144372	-0.01	10.4
DDH-598	94.5	94.8	0.3	DC144373	0.01	1.1
DDH-598	94.8	95.8	1.0	DC144374	-0.01	1.5
DDH-598	101.6	102.6	1.0	DC144375	-0.01	3.6
DDH-598	102.6	103.6	1.0	DC144376	-0.01	1.7
DDH-598	103.6	104.6	1.0	DC144377	-0.01	2.7
DDH-598	104.6	105.6	1.0	DC144378	0.04	5.0
DDH-598	105.6	106.6	1.0	DC144379	0.01	1.4
DDH-598	106.6	107.3	0.7	DC144380	-0.01	1.8
DDH-598	107.3	107.6	0.3	DC144381	-0.01	3.4
DDH-598	107.6	108.3	0.7	DC144382	-0.01	38.0
DDH-598	108.3	108.5	0.2	DC144383	0.01	4.7
DDH-598	108.5	109.5	1.0	DC144384	-0.01	21.0
DDH-598	109.5	110.5	1.0	DC144385	-0.01	6.5
DDH-598	110.5	111.5	1.0	DC144386	0.01	3.6
DDH-598	111.5	112.5	1.0	DC144387	0.07	2.1
DDH-598	112.5	113.5	1.0	DC144388	0.02	0.4

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-598	113.5	114.5	1.0	DC144389	0.01	9.9
DDH-598	114.5	114.6	0.1	DC144390	0.02	5.7
DDH-598	114.6	114.8	0.2	DC144391	-0.01	6.0
DDH-598	114.8	115.8	1.0	DC144392	0.01	9.7
DDH-598	115.8	116.8	1.0	DC144393	0.01	5.4
DDH-598	116.8	117.4	0.5	DC144394	0.01	8.9
DDH-598	117.4	118.0	0.7	DC144395	-0.01	1.8
DDH-598	118.0	118.7	0.7	DC144396	0.01	5.6
DDH-598	118.7	119.7	1.0	DC144397	-0.01	0.4
DDH-598	119.7	120.2	0.5	DC144398	-0.01	2.3
DDH-598	120.2	120.7	0.5	DC144399	0.01	6.5
DDH-598	120.7	121.1	0.4	DC144400	0.04	2.1
DDH-598	121.1	122.1	1.0	DC185501	-0.01	22.9
DDH-598	122.1	123.1	1.0	DC185502	-0.01	5.1
DDH-598	123.1	124.1	1.0	DC185503	-0.01	5.3
DDH-598	124.1	125.1	1.0	DC185504	-0.01	14.9
DDH-598	125.1	125.7	0.6	DC185505	-0.01	7.7
DDH-598	125.7	126.1	0.4	DC185506	0.03	0.4
DDH-598	126.1	127.1	1.0	DC185507	0.02	2.3
DDH-598	127.1	127.6	0.5	DC185508	0.02	2.1
DDH-598	127.6	127.9	0.3	DC185509	0.02	14.9
DDH-598	127.9	128.2	0.3	DC185510	0.03	16.0
DDH-598	128.2	128.5	0.3	DC185511	0.02	2.2
DDH-598	128.5	129.5	1.0	DC185512	0.02	2.6
DDH-598	129.5	130.5	1.0	DC185513	0.01	16.3
DDH-598	130.5	131.5	1.0	DC185514	0.01	7.8
DDH-598	131.5	132.5	1.0	DC185515	0.08	1.8
DDH-598	132.5	132.9	0.4	DC185516	0.04	1.5
DDH-598	132.9	133.9	1.0	DC185517	0.03	11.1
DDH-598	133.9	134.9	1.0	DC185518	0.04	-0.2
DDH-598	134.9	135.9	1.0	DC185519	0.04	3.5
DDH-598	135.9	136.9	1.0	DC185520	0.05	25.1
DDH-598	136.9	137.9	1.0	DC185521	0.06	2.3
DDH-598	137.9	138.9	1.0	DC185522	0.05	6.6
DDH-598	138.9	139.9	1.0	DC185523	0.03	12.8
DDH-598	139.9	140.6	0.7	DC185524	0.15	24.4
DDH-598	140.6	141.0	0.4	DC185525	1.04	20.6
DDH-598	141.0	141.6	0.6	DC185526	0.61	7.3

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-598	141.6	141.8	0.2	DC185527	0.10	15.8
DDH-598	141.8	142.2	0.4	DC185528	0.24	41.8
DDH-598	142.2	142.7	0.5	DC185529	0.25	17.0
DDH-598	142.7	143.1	0.4	DC185530	0.22	19.0
DDH-598	143.1	143.4	0.3	DC185531	0.18	14.9
DDH-598	143.4	143.8	0.4	DC185532	1.22	4.5
DDH-598	143.8	144.1	0.3	DC185533	0.12	4.4
DDH-598	144.1	144.6	0.5	DC185534	0.67	2.1
DDH-598	144.6	144.9	0.3	DC185535	0.26	1.4
DDH-598	144.9	145.3	0.4	DC185536	0.53	1.7
DDH-598	145.3	146.1	0.8	DC185537	0.15	0.6
DDH-598	146.1	146.4	0.3	DC185538	0.18	0.9
DDH-598	146.4	146.9	0.4	DC185539	1.58	15.6
DDH-598	146.9	147.1	0.3	DC185540	0.34	5.3
DDH-598	147.1	147.5	0.4	DC185541	0.78	6.8
DDH-598	147.5	148.1	0.6	DC185542	0.21	9.3
DDH-598	148.1	148.5	0.4	DC185543	0.04	37.8
DDH-598	148.5	148.8	0.3	DC185544	0.24	28.6
DDH-598	148.8	149.2	0.4	DC185545	0.09	2.7
DDH-598	149.2	149.6	0.4	DC185546	0.14	3.2
DDH-598	149.6	150.2	0.6	DC185547	0.21	2.6
DDH-598	150.2	150.5	0.3	DC185548	1.17	4.0
DDH-598	150.5	151.0	0.4	DC185549	1.30	7.8
DDH-598	151.0	151.5	0.5	DC185550	2.12	15.8
DDH-598	151.5	151.8	0.3	DC185551	3.30	30.1
DDH-598	151.8	152.1	0.3	DC185552	1.14	12.3
DDH-598	152.1	152.3	0.2	DC185553	1.02	3.0
DDH-598	152.3	152.7	0.4	DC185554	1.17	3.2
DDH-598	152.7	153.4	0.7	DC185555	0.67	24.6
DDH-598	153.4	153.7	0.3	DC185556	3.70	6.2
DDH-598	153.7	154.3	0.6	DC185557	2.77	8.1
DDH-598	154.3	154.9	0.6	DC185558	1.71	9.0
DDH-598	154.9	155.3	0.5	DC185559	2.24	6.4
DDH-598	155.3	155.6	0.3	DC185560	3.61	9.6
DDH-598	155.6	155.9	0.3	DC185561	1.24	2.1
DDH-598	155.9	156.3	0.4	DC185562	0.15	2.2
DDH-598	156.3	156.8	0.5	DC185563	0.14	4.6
DDH-598	156.8	157.3	0.5	DC185564	0.13	47.3

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-598	157.3	157.6	0.3	DC185565	0.07	9.4
DDH-598	157.6	157.9	0.3	DC185566	0.05	7.4
DDH-598	157.9	158.3	0.3	DC185567	0.07	8.4
DDH-598	158.3	158.6	0.3	DC185568	0.08	4.9
DDH-598	158.6	159.0	0.4	DC185569	0.04	19.3
DDH-598	159.0	160.0	1.0	DC185570	0.02	1.4
DDH-598	160.0	161.0	1.0	DC185571	0.02	1.3
DDH-598	166.5	167.5	1.0	DC185572	0.02	11.1
DDH-598	167.5	168.5	1.0	DC185573	-0.01	6.1
DDH-598	178.2	179.2	1.0	DC185574	0.02	9.6
DDH-598	179.2	180.2	1.0	DC185575	0.02	2.3
DDH-598	180.2	181.2	1.0	DC185576	0.02	39.1
DDH-598	181.2	181.4	0.2	DC185577	0.04	9.3
DDH-598	181.4	182.2	0.8	DC185578	0.01	4.6
DDH-598	182.2	182.6	0.4	DC185579	0.04	3.3
DDH-598	182.6	183.6	1.0	DC185580	-0.01	1.3
DDH-598	232.3	233.3	1.0	DC185581	-0.01	0.4
DDH-598	233.3	233.5	0.2	DC185582	-0.01	0.7
DDH-598	233.5	234.5	1.0	DC185583	-0.01	0.7
DDH-599	32.6	33.6	1.0	DC185584	-0.01	-0.5
DDH-599	33.6	34.0	0.4	DC185585	-0.01	-0.5
DDH-599	34.0	35.0	1.0	DC185586	-0.01	0.8
DDH-599	35.0	36.0	1.0	DC185587	-0.01	0.5
DDH-599	36.0	37.0	1.0	DC185588	-0.01	1.1
DDH-599	37.0	38.0	1.0	DC185589	-0.01	-0.5
DDH-599	38.0	38.5	0.5	DC185590	-0.01	2.2
DDH-599	38.5	38.8	0.3	DC185591	-0.01	0.6
DDH-599	38.8	39.7	1.0	DC185592	-0.01	-0.5
DDH-599	39.7	39.9	0.2	DC185593	-0.01	1.0
DDH-599	39.9	40.9	1.0	DC185594	-0.01	0.5
DDH-599	66.0	67.0	1.0	DC185595	0.02	-0.5
DDH-599	67.0	67.2	0.2	DC185596	0.02	-0.5
DDH-599	67.2	68.2	1.0	DC185597	0.01	0.7
DDH-599	68.2	69.2	1.0	DC185598	-0.01	0.5
DDH-599	69.2	70.1	0.8	DC185599	-0.01	0.7
DDH-599	70.1	71.0	0.9	DC185600	-0.01	1.7
DDH-599	71.0	71.3	0.3	DC185601	-0.01	0.6
DDH-599	71.3	71.7	0.4	DC185602	-0.01	0.6

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-599	71.7	72.1	0.3	DC185603	-0.01	0.9
DDH-599	72.1	73.1	1.0	DC185604	-0.01	-0.5
DDH-599	75.0	76.0	1.0	DC185605	-0.01	0.8
DDH-599	76.0	77.0	1.0	DC185606	-0.01	-0.5
DDH-599	77.0	77.8	0.8	DC185607	-0.01	0.5
DDH-599	77.8	78.8	1.0	DC185608	-0.01	-0.5
DDH-599	78.8	79.2	0.4	DC185609	0.02	-0.5
DDH-599	79.2	79.6	0.4	DC185610	-0.01	-0.5
DDH-599	79.6	80.0	0.4	DC185611	-0.01	0.8
DDH-599	80.0	80.6	0.6	DC185612	0.02	0.8
DDH-599	80.6	81.1	0.5	DC185613	0.03	-0.5
DDH-599	81.1	81.7	0.6	DC185614	-0.01	-0.5
DDH-599	81.7	82.4	0.7	DC185615	0.02	0.9
DDH-599	82.4	82.8	0.4	DC185616	0.02	1.0
DDH-599	82.8	83.3	0.5	DC185617	-0.01	-0.5
DDH-599	83.3	83.6	0.3	DC185618	-0.01	0.6
DDH-599	83.6	84.5	0.9	DC185619	-0.01	-0.5
DDH-599	84.5	84.8	0.3	DC185620	-0.01	0.6
DDH-599	84.8	85.1	0.3	DC185621	0.02	-0.5
DDH-599	85.1	85.4	0.3	DC185622	0.01	0.8
DDH-599	85.4	86.4	1.0	DC185623	-0.01	-0.5
DDH-599	86.4	86.8	0.4	DC185624	-0.01	-0.5
DDH-599	86.8	87.8	1.0	DC185625	-0.01	-0.5
DDH-599	87.8	88.7	0.9	DC185626	-0.01	0.9
DDH-599	88.7	89.2	0.5	DC185627	-0.01	-0.5
DDH-599	89.2	89.7	0.5	DC185628	-0.01	0.7
DDH-599	89.7	90.0	0.3	DC185629	-0.01	-0.5
DDH-599	90.0	90.5	0.5	DC185630	-0.01	-0.5
DDH-599	90.5	91.4	0.9	DC185631	-0.01	0.6
DDH-599	91.4	92.1	0.7	DC185632	-0.01	-0.5
DDH-599	92.1	93.1	1.0	DC185633	0.01	1.2
DDH-599	93.1	93.6	0.5	DC185634	0.18	2.1
DDH-599	93.6	93.8	0.2	DC185635	0.23	1.4
DDH-599	93.8	94.1	0.3	DC185636	0.44	3.0
DDH-599	94.1	94.4	0.4	DC185637	0.15	2.4
DDH-599	94.4	94.7	0.3	DC185638	0.21	1.5
DDH-599	94.7	95.0	0.3	DC185639	0.36	2.5
DDH-599	95.0	95.3	0.3	DC185640	0.30	3.4

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-599	95.3	95.7	0.4	DC185641	0.48	7.0
DDH-599	95.7	95.9	0.2	DC185642	1.49	8.2
DDH-599	95.9	96.1	0.2	DC185643	1.91	9.8
DDH-599	96.1	96.4	0.3	DC185644	0.08	2.3
DDH-599	96.4	96.7	0.3	DC185645	0.10	4.4
DDH-599	96.7	97.0	0.3	DC185646	0.07	3.0
DDH-599	97.0	97.3	0.3	DC185647	0.54	1.7
DDH-599	97.3	97.6	0.3	DC185648	0.51	5.2
DDH-599	97.6	97.9	0.3	DC185649	0.32	7.7
DDH-599	97.9	98.2	0.3	DC185650	0.03	1.5
DDH-599	98.2	98.6	0.3	DC185651	0.02	0.7
DDH-599	98.6	99.1	0.5	DC185652	0.03	2.3
DDH-599	99.1	99.5	0.4	DC185653	0.11	6.4
DDH-599	99.5	99.8	0.3	DC185654	0.05	2.9
DDH-599	99.8	100.0	0.2	DC185655	0.11	4.9
DDH-599	100.0	100.3	0.3	DC185656	0.11	4.9
DDH-599	100.3	100.5	0.2	DC185657	0.10	5.9
DDH-599	100.5	100.8	0.3	DC185658	0.03	2.2
DDH-599	100.8	101.1	0.3	DC185659	0.03	1.6
DDH-599	101.1	101.5	0.4	DC185660	0.03	1.9
DDH-599	101.5	101.8	0.3	DC185661	0.05	4.3
DDH-599	101.8	102.1	0.3	DC185662	0.13	8.3
DDH-599	102.1	102.5	0.4	DC185663	0.11	5.8
DDH-599	102.5	102.8	0.3	DC185664	0.17	8.5
DDH-599	102.8	103.2	0.5	DC185665	0.19	8.3
DDH-599	103.2	104.1	0.8	DC185666	0.02	-0.5
DDH-599	104.1	104.5	0.4	DC185667	0.03	-0.5
DDH-599	104.5	105.5	1.0	DC185668	0.02	-0.5
DDH-599	105.5	106.0	0.5	DC185669	0.01	-0.5
DDH-599	106.0	106.3	0.3	DC185670	0.14	3.8
DDH-599	106.3	106.6	0.3	DC185671	0.03	0.7
DDH-599	106.6	106.8	0.3	DC185672	0.01	-0.5
DDH-599	106.8	107.3	0.5	DC185673	-0.01	-0.5
DDH-599	107.3	108.3	1.0	DC185674	0.01	-0.5
DDH-599	108.3	108.6	0.3	DC185675	0.15	1.3
DDH-599	108.6	108.9	0.3	DC185676	0.33	0.6
DDH-599	108.9	109.2	0.3	DC185677	0.36	1.3
DDH-599	109.2	109.8	0.5	DC185678	6.94	16.0

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-599	109.8	110.2	0.5	DC185679	1.13	2.0
DDH-599	110.2	110.6	0.3	DC185680	0.78	1.8
DDH-599	110.6	110.8	0.3	DC185681	0.55	0.9
DDH-599	110.8	111.1	0.3	DC185682	0.74	2.6
DDH-599	111.1	111.5	0.4	DC185683	0.28	0.8
DDH-599	111.5	111.8	0.3	DC185684	0.18	1.3
DDH-599	111.8	112.0	0.2	DC185685	0.62	0.7
DDH-599	112.0	112.4	0.5	DC185686	0.17	1.2
DDH-599	112.4	112.8	0.4	DC185687	0.05	1.6
DDH-599	112.8	113.1	0.3	DC185688	0.01	-0.5
DDH-599	113.1	113.4	0.3	DC185689	0.06	0.5
DDH-599	113.4	113.9	0.5	DC185690	0.04	0.5
DDH-599	113.9	114.1	0.3	DC185691	0.17	7.1
DDH-599	114.1	114.4	0.3	DC185692	0.09	3.9
DDH-599	114.4	114.9	0.4	DC185693	0.04	0.6
DDH-599	114.9	115.1	0.3	DC185694	0.02	0.5
DDH-599	115.1	115.3	0.2	DC185695	0.03	0.9
DDH-599	115.3	115.8	0.5	DC185696	0.03	-0.5
DDH-599	115.8	116.3	0.5	DC185697	0.04	1.0
DDH-599	116.3	116.5	0.3	DC185698	0.18	1.4
DDH-599	116.5	116.7	0.2	DC185699	0.23	1.6
DDH-599	116.7	117.2	0.5	DC185700	0.02	0.6
DDH-599	117.2	117.4	0.2	DC185701	-0.01	-0.5
DDH-599	117.4	117.8	0.3	DC185702	-0.01	0.8
DDH-599	117.8	118.2	0.4	DC185703	-0.01	-0.5
DDH-599	118.2	118.6	0.4	DC185704	-0.01	0.9
DDH-599	118.6	118.9	0.3	DC185705	-0.01	0.5
DDH-599	118.9	119.4	0.5	DC185706	0.02	0.8
DDH-599	119.4	119.9	0.6	DC185707	0.13	3.9
DDH-599	119.9	120.3	0.3	DC185708	0.23	5.3
DDH-599	120.3	120.6	0.3	DC185709	0.20	5.4
DDH-599	120.6	121.1	0.5	DC185710	0.08	2.8
DDH-599	121.1	121.5	0.5	DC185711	0.04	0.6
DDH-599	121.5	121.7	0.2	DC185712	-0.01	-0.5
DDH-599	121.7	122.0	0.3	DC185713	0.06	3.0
DDH-599	122.0	122.4	0.4	DC185714	0.01	-0.5
DDH-599	122.4	122.9	0.6	DC185715	-0.01	-0.5
DDH-599	122.9	123.4	0.5	DC185716	0.02	-0.5

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-599	123.4	123.9	0.4	DC185717	-0.01	1.2
DDH-599	123.9	124.3	0.5	DC185718	-0.01	1.0
DDH-599	124.3	124.7	0.4	DC185719	-0.01	1.4
DDH-599	124.7	125.0	0.3	DC185720	0.03	1.0
DDH-599	125.0	125.8	0.8	DC185721	-0.01	0.7
DDH-599	125.8	126.8	1.0	DC185722	-0.01	0.9
DDH-599	126.8	127.8	1.0	DC185723	-0.01	0.5
DDH-599	127.8	128.8	1.0	DC185724	-0.01	-0.5
DDH-599	128.8	129.8	1.0	DC185725	-0.01	-0.5
DDH-599	129.8	130.8	1.0	DC185726	-0.01	0.5
DDH-599	130.8	131.8	1.0	DC185727	-0.01	1.5
DDH-599	131.8	132.2	0.3	DC185728	-0.01	1.5
DDH-599	132.2	132.9	0.8	DC185729	-0.01	1.5
DDH-599	132.9	133.9	1.0	DC185730	-0.01	1.3
DDH-599	133.9	134.6	0.7	DC185731	-0.01	-0.5
DDH-599	134.6	135.3	0.7	DC185732	-0.01	1.4
DDH-599	135.3	135.6	0.3	DC185733	-0.01	1.7
DDH-599	135.6	136.4	0.8	DC185734	-0.01	1.0
DDH-599	136.4	136.7	0.3	DC185735	-0.01	-0.5
DDH-599	136.7	137.0	0.3	DC185736	-0.01	-0.5
DDH-599	137.0	138.0	1.0	DC185737	0.01	1.1
DDH-599	138.0	139.0	1.0	DC185738	-0.01	1.0
DDH-599	139.0	139.4	0.4	DC185739	0.01	-0.5
DDH-599	139.4	140.0	0.6	DC185740	-0.01	1.6
DDH-599	140.0	140.9	0.9	DC185741	-0.01	1.0
DDH-599	140.9	141.3	0.4	DC185742	-0.01	-0.5
DDH-599	141.3	141.7	0.4	DC185743	-0.01	-0.5
DDH-599	141.7	142.2	0.5	DC185744	-0.01	1.6
DDH-599	142.2	142.7	0.5	DC185745	-0.01	0.7
DDH-599	142.7	143.4	0.7	DC185746	0.17	-0.5
DDH-599	143.4	143.6	0.2	DC185747	10.14	24.9
DDH-599	143.6	143.9	0.3	DC185748	1.42	5.9
DDH-599	143.9	144.2	0.3	DC185749	5.36	4.2
DDH-599	144.2	144.5	0.3	DC185750	2.30	2.1
DDH-599	144.5	144.7	0.3	DC185751	0.25	1.6
DDH-599	144.7	145.2	0.5	DC185752	0.21	0.6
DDH-599	145.2	145.4	0.2	DC185753	0.27	1.0
DDH-599	145.4	145.6	0.3	DC185754	0.22	5.8

Hole ID	Down-Hole From (m)	Down -Hole To (m)	Down-Hole Interval	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-599	145.6	145.8	0.2	DC185755	0.22	8.6
DDH-599	145.8	146.1	0.3	DC185756	0.06	4.7
DDH-599	146.1	146.2	0.1	DC185757	0.07	2.3
DDH-599	146.2	146.6	0.4	DC185758	0.13	2.2
DDH-599	146.6	146.8	0.3	DC185759	0.08	3.0
DDH-599	146.8	147.1	0.3	DC185760	0.38	5.4
DDH-599	147.1	147.4	0.3	DC185761	0.53	7.2
DDH-599	147.4	147.7	0.3	DC185762	0.28	2.3
DDH-599	147.7	148.0	0.3	DC185763	0.92	2.9
DDH-599	148.0	148.2	0.3	DC185764	0.34	0.8
DDH-599	148.2	148.4	0.2	DC185765	0.08	1.1
DDH-599	148.4	148.6	0.2	DC185766	0.14	1.0
DDH-599	148.6	148.9	0.3	DC185767	0.13	3.8
DDH-599	148.9	149.1	0.2	DC185768	0.33	5.8
DDH-599	149.1	149.3	0.3	DC185769	0.12	4.6
DDH-599	149.3	150.5	1.2	DC185770	-0.01	2.0
DDH-599	150.5	150.8	0.3	DC185771	0.17	10.3
DDH-599	150.8	151.1	0.3	DC185772	0.64	33.8
DDH-599	151.1	151.3	0.3	DC185773	0.24	18.1
DDH-599	151.3	151.6	0.3	DC185774	0.14	11.2
DDH-599	151.6	152.0	0.3	DC185775	0.17	8.2
DDH-599	152.0	152.3	0.4	DC185776	0.17	14.6
DDH-599	152.3	152.7	0.4	DC185777	0.11	17.4
DDH-599	152.7	153.1	0.4	DC185778	0.26	14.0
DDH-599	153.1	153.4	0.3	DC185779	0.08	6.1
DDH-599	153.4	153.6	0.2	DC185780	0.07	3.2
DDH-599	153.6	154.5	0.8	DC185781	0.06	3.3
DDH-599	154.5	155.0	0.6	DC185782	0.05	2.4
DDH-599	155.0	155.4	0.4	DC185783	0.10	3.3
DDH-599	155.4	155.7	0.3	DC185784	0.08	1.9
DDH-599	155.7	156.0	0.3	DC185785	0.12	1.9
DDH-599	156.0	156.4	0.5	DC185786	0.08	2.2
DDH-599	156.4	157.3	0.8	DC185787	0.13	3.7
DDH-599	157.3	157.8	0.6	DC185788	0.03	1.7