

## Step-out Drilling Extends Gold Mineralisation at the Maul Vein, Way Linggo Project

Kingsrose Mining Limited (ASX: KRM) (“Kingsrose” or the “Company”) is pleased to announce high-grade gold and silver intercepts from five core drill holes totalling 988.3 metres on the Maul Vein target at the Way Linggo project, Indonesia (Figures 1 to 3 and Tables 1 and 2).

### Highlights

- The drill defined strike length of the Maul Vein mineralised zone has been increased from 160 to 550 metres and remains open along strike, and with potential to discover plunging shoots extending to depth.
- New significant downhole intercepts include:
  - **11.7 metres at 4.0 g/t gold**, 39.6 g/t silver (from 137.4 metres, DDH-602), including
    - **0.9 metres at 7.6 g/t gold**, 169 g/t silver (from 140.0 metres), and
    - **1.6 metres at 12.8 g/t gold**, 62 g/t silver (from 143.9 metres)
  - **5.0 metres at 4.1 g/t gold**, 22 g/t silver (from 97.6 metres, DDH-601), including
    - **0.3 metres at 13.2 g/t gold**, 60 g/t silver (from 97.6 metres)
  - **4.2 metres at 4.6 g/t gold**, 17 g/t silver (from 97.4 metres, DDH-603), including
    - **2.0 metres at 7.3 g/t gold**, 21 g/t silver (from 97.6 metres)

Fabian Baker, Kingsrose Managing Director, commented “*The Maul Vein discovery represents a significant and open zone of gold and silver mineralisation, which occurs from surface and is located only 500 metres west of the past producing Talang Santo mine and current Mineral Resource. Drilling to date indicates good potential that the area could be advanced to definition of a new Mineral Resource and represents a potential open pit target.*”

*Kingsrose continues to seek divestment opportunities for Way Linggo and this recent exploration success highlights the potential of the project area. The Company will keep the market informed of developments with respect to this process.”*

### Maul Vein Drilling Results

Five diamond drill holes totalling 988.3 metres were completed in February and March 2022 (Table 2). These holes were designed to test strike extensions from mineralisation identified in trenching and initial exploration drilling, as announced on 1 November 2021 and 20 January 2022, respectively. A total of ten holes for 1805.0 metres have now been completed at the Maul Vein target since its discovery in 2021.

Drilling at the Maul Vein target has confirmed mineralisation over a strike length of 550 metres and to at least 200 metres below surface. Mineralisation remains open along strike in both directions, and potential remains to discover plunging shoots extending to depth. Holes DDH-601 to 603 have consistently returned wide, well mineralised intercepts and have extended mineralisation to the southeast in an open mineralised zone (Figure 3). At depth, DDH-600 returned 0.85 metres at 5.2 g/t gold from 260.4 metres downhole. This indicates that although narrow, the gold tenor remains elevated with potential for wider zones.

TABLE 1: Significant drill intercepts from the February and March 2022 drill program, Maul Vein

Hole ID	From (m)	Interval (m) <sup>2</sup>	Au (g/t)	Ag (g/t)	Vein Interpretation
DDH-600	260.40	0.85	5.21	7.1	SB Vein
DDH-601	97.60	5.00	4.13	21.8	SB Vein
<i>including</i>	<i>97.60</i>	<i>0.30</i>	<i>13.19</i>	<i>60.0</i>	
<i>and</i>	<i>100.10</i>	<i>1.10</i>	<i>9.91</i>	<i>49.1</i>	
<i>and</i>	<i>101.80</i>	<i>0.40</i>	<i>7.71</i>	<i>41.0</i>	
	133.20	2.35	2.76	9.1	Maul Vein
DDH-602	137.40	11.70	4.04	39.6	Maul Vein
<i>including</i>	<i>140.00</i>	<i>0.85</i>	<i>7.62</i>	<i>169.3</i>	
<i>and</i>	<i>143.90</i>	<i>1.60</i>	<i>12.80</i>	<i>61.7</i>	
DDH-603	97.35	4.15	4.61	17.1	Maul Vein
<i>including</i>	<i>99.20</i>	<i>2.00</i>	<i>7.28</i>	<i>20.6</i>	
DDH-604	47.60	2.00	1.29	0.6	SB Vein
	53.75	1.00	6.00	14.4	SB Vein
	58.20	0.80	7.38	4.8	SB Vein
	61.00	1.60	1.43	2.2	SB Vein
<b>Notes:</b>					
1. Significant intercepts were calculated using a 1.0 g/t gold lower cut-off					
2. Downhole interval is reported, due to the early stage of exploration and lack of detailed structural data, it is not possible to estimate true widths					

TABLE 2: Drill hole collar data.

Hole ID	Easting	Northing	Elevation (m)	Inclination (°)	Azimuth (°)	Length (m)
DDH-600	432729	9425536	1268	-55	210	367.9
DDH-601	432720	9425320	1269	-55	210	170.5
DDH-602	432801	9425261	1277	-54	210	180.9
DDH-603	432873	9425182	1258	-55	210	143.0
DDH-604	432423	9425487	1273	-55	210	126.0

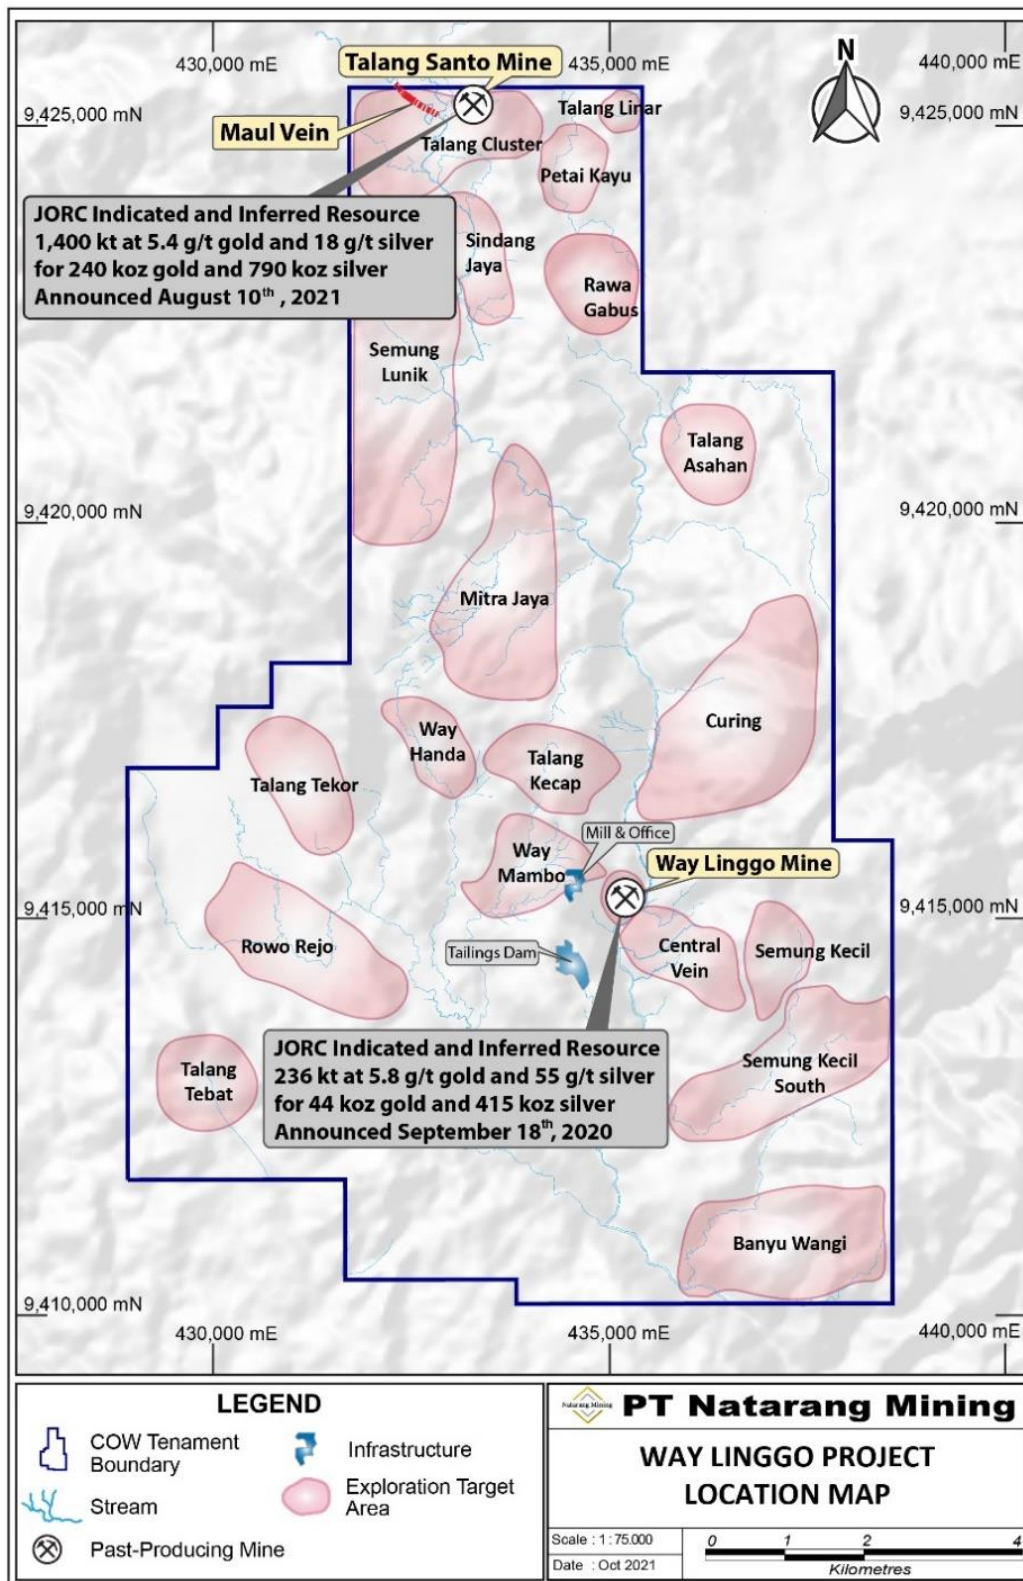


FIGURE 1: Map showing exploration prospects and past-producing mines within the Way Linggo project.



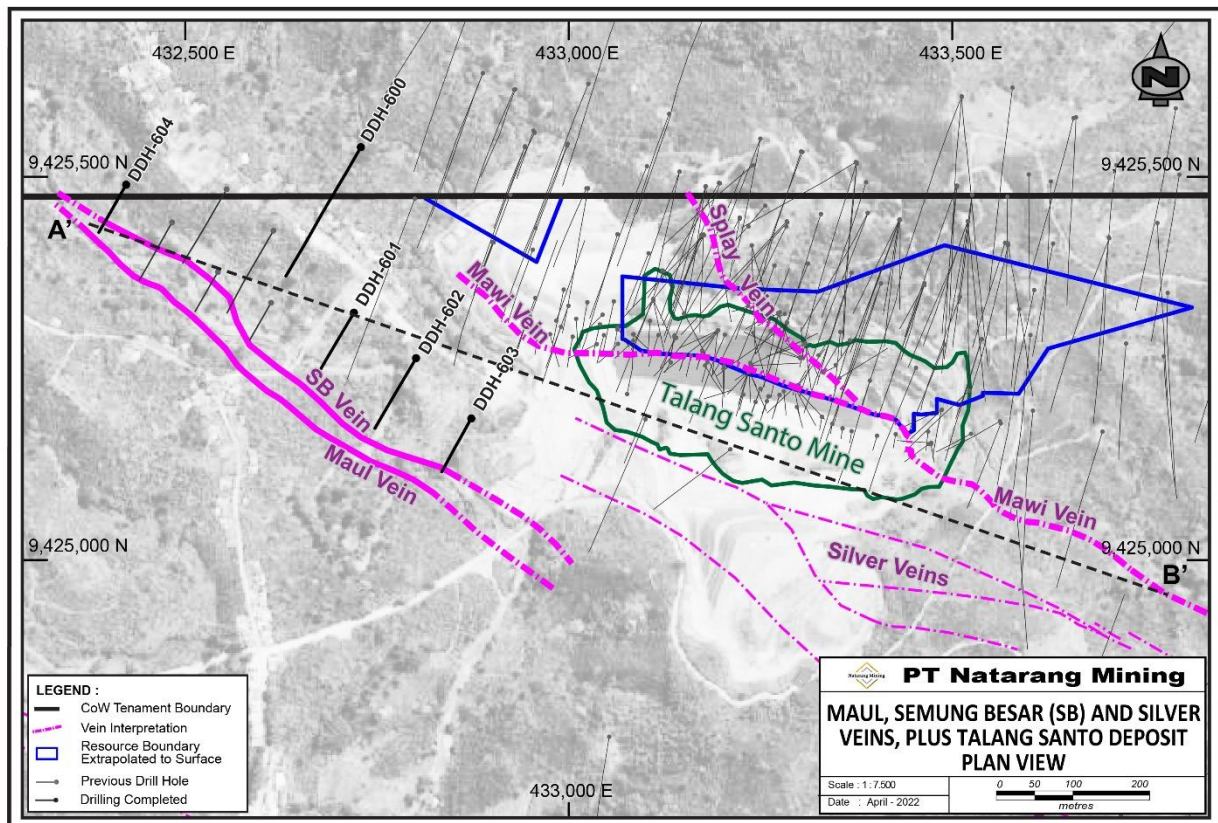


FIGURE 2: Drill collar locations at the Maul and Semung Besar (“SB”) veins, located 500 metres west of the Talang Santo mine.

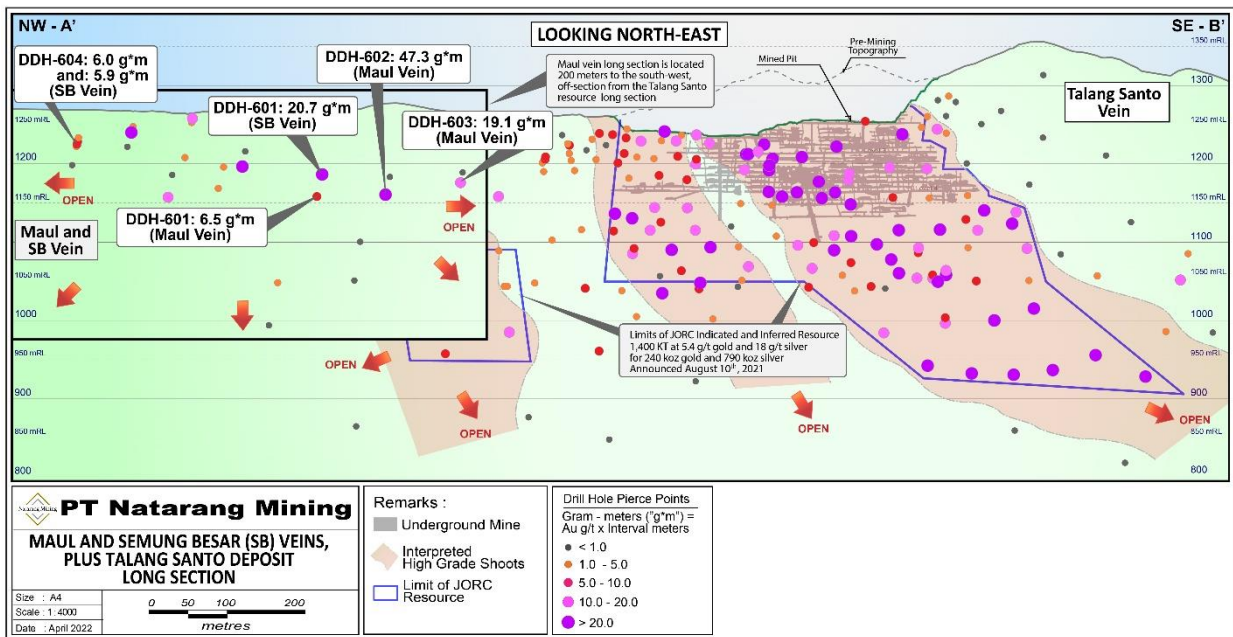


FIGURE 3: Long section showing the Maul Vein relative to the Talang Santo Mineral Resource and mine.

-ENDS-

**For more information please contact:**

**Dani McIntosh**  
Investor Relations  
+61 8 9389 4494  
[info@kingsrosemining.com](mailto:info@kingsrosemining.com)

This announcement has been authorised for release to the ASX by the Board.

For further information regarding the Company and its projects please visit [www.kingsrosemining.com](http://www.kingsrosemining.com)

### About Kingsrose Mining Limited

Kingsrose Mining Limited is an ASX-listed mining and mineral exploration company. Following ceasing production at its Way Linggo mine in Indonesia, having produced over 200 koz gold and 1.5 Moz silver, in 2021 the Company commenced a new discovery-focused strategy targeting the acquisition and exploration of new mineral deposits. Kingsrose has acquired exploration projects in Finland and Norway and is currently conducting regional exploration around the former mines at Way Linggo.

### Forward-looking statements

This announcement includes forward-looking statements, including forward looking statements relating to the future operation of the Company. These forward-looking statements are based on the Company's expectations and beliefs concerning future events. Forward-looking statements are necessarily subject to risks, uncertainties and other factors, many of which are outside the control of the Company, which could cause actual results to differ materially from such statements. The Company makes no undertaking to subsequently update or revise the forward-looking statements made in this announcement to reflect the circumstances or events after the date of this announcement.

You are strongly cautioned not to place undue reliance on forward-looking statements, particularly in light of the current economic climate and the significant volatility, uncertainty and disruption caused by COVID-19.

### Competent Persons Statement

The information in this report that relates to Exploration Results is based on information compiled under the supervision of Andrew Tunningley, who is a Member and Chartered Professional (Geology) of the Australasian Institute of Mining and Metallurgy and is Head of Exploration for Kingsrose Mining Limited. Mr Tunningley has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves." Mr Tunningley consents to the inclusion in this report of the matter based on his information in the form and context in which it appears.

## APPENDIX 1

### JORC CODE, 2012 EDITION – TABLE 1

#### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>This Table 1 relates to sampling by diamond drilling, soil auger, rock chip and channel sampling.</li> <li>Diamond drilling and channel sampling sample intervals are designed to honor geological boundaries.</li> <li>Core is aligned and measured by tape, referenced to downhole core blocks.</li> <li>Diamond drilling and Channel sampling are completed to industry standard using various sampling intervals (0.1m to 1.5m) dominated by geological constraints (e.g. Rock types, veining and alteration/sulphidation).</li> <li>Rock chip samples are collected by hand using a rock hammer with multiple pieces of rock collected at one location for each sample.</li> <li>Channel samples are collected by hand using a rock hammer with multiple pieces of rock collected from left to right across the channel sample interval.</li> <li>Soil Samples are collected by hand drilling with an auger to the C-horizon. Only C-horizon material is sampled.</li> <li>Soil, Rock chip and Channel sample locations are picked up by a handheld GPS with tape and bearing measurements used where required. Sample rock types and alteration were recorded where the rock and alteration was identifiable.</li> <li>Soil, Rock chip and Channel samples are collected directly from the rock. Samples were collected damp with natural moisture.</li> <li>Soil, Rock chip and Channel samples are inherently variable and do not accurately represent the average grade of the surrounding rock. Soil, Rock chip and Channel samples are used as a non- quantitative guide for assessing prospectivity hence are regarded as suitable for this purpose.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Diamond drill core. Several core sizes are used: NQ (47.6mm nominal core diameter). HQ (63.5mm nominal core diameter). PQ (85.0mm nominal core diameter).</li> <li>Core is not orientated.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> </ul>	<ul style="list-style-type: none"> <li>Diamond drill recoveries are recorded as a percentage of measured core against downhole drilled intervals. Achieved ≈90% recoveries.</li> <li>Standard drilling practice used to ensure maximum core recoveries.</li> <li>A documented relationship between core recoveries and grade has not yet been established although core loss occurred in some</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<p>of the high-grade intersections due to the friable nature of the vein material.</p> <ul style="list-style-type: none"> <li>Rock chip and channel sampling is taken from an in-situ outcrop or trench into a sample bag using a standard geological hammer according to typical industry practice.</li> <li>Soil sampling is taken from the in-situ soil C-horizon with hand drill auger according to typical industry practice.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>Core logging is conducted by PT. Natarang Mining ("PTNM") geologists, who delineate intervals on geological, structural, alteration and/or mineralogical boundaries, to industry standard.</li> <li>Core logging is qualitative and all core is photographed. Rock types, veining and alteration/sulphidation are all recorded.</li> <li>100% of drill core is logged.</li> <li>Soil Rock Chip and Channel sampling is conducted by PTNM geologists, logging is qualitative and all Rock Chip and Channel sampling is photographed. Rock types, veining and alteration/sulphidation are all recorded.</li> <li>100% of Soil, Rock Chip and Channel sampling is logged.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>Core is cut by diamond saw and half core used for sampling, the remaining half is archived. For gouge, soft and friable core a manual knife (or similar device) is used to approximately halve the core.</li> <li>Rock chip samples are collected by hand using a rock hammer with multiple pieces of rock collected at one location for each sample. Samples were collected damp with natural moisture.</li> <li>Channel samples are nominally chipped horizontally from left to right across the outcrop or trench, subset by geological features. Sample collection is manual via a geological hammer. Samples were collected damp with natural moisture.</li> <li>Soil samples are collected by manual hand drill auger to the in-situ soil C-horizon. Samples were collected damp with natural moisture.</li> <li>Diamond drilling, Rock chip and Channel samples are crushed and pulverised to create a 30g charge for fire assay lead collection followed by flame atomic adsorption spectrometry. Analysis for silver is via gamma ray spectrometry.</li> <li>The nature, quality and appropriateness of the sample preparation technique is typical for mineralisation of this type and is deemed adequate.</li> <li>Duplicate samples are not routinely sampled.</li> <li>The Competent Person is not aware of any work taken to maximise the representivity of the sample.</li> <li>The sample size far exceeds the grain size of the precious metals, which are generally microscopic. Sample sizes are appropriate.</li> </ul>
<b>Quality of assay data and</b>	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures</li> </ul>	<ul style="list-style-type: none"> <li>Gold concentration in diamond drilling, soil, rock chip and channel samples is determined by fire assay: fusion with lead collection, aqua regia prill digestion,</li> </ul>



Criteria	JORC Code explanation	Commentary
<b>laboratory tests</b>	<p>used and whether the technique is considered partial or total.</p> <ul style="list-style-type: none"> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<p>followed by atomic absorption spectrometry (AAS). Analysis for silver in diamond drilling is acid digestion of sample pulp followed by inductively coupled plasma optical emission spectrometry (ICPOES). - Gold and silver concentrations in historical Rock chip samples was determined by aqua regia digestion with an AAS finish. Analysis is considered total for fire assay and near total for all other assay types of both silver and gold. Accordingly, no treatment (i.e. factoring or similar) has been performed to the raw assay to allow for incomplete digestion, if any.</p> <ul style="list-style-type: none"> <li>Geophysical tools etc are not applicable to this report. None used.</li> <li>The QAQC protocols used include the following:</li> <li>Commercial blanks are used at an incidence of 1 per fire assay batch, with a batch consisting of a maximum of 42 samples and a minimum of 20 samples.</li> <li>Commercial standards are used at an incidence of 2 per fire assay batch, with a batch consisting of a maximum of 42 samples and a minimum of 20 samples.</li> <li>Drill core coarse duplicates and drill core pulp duplicates are chosen to represent the general resource gold grade distribution and approximately 5% total sent for re-assay at Pt Geoservices laboratory.</li> <li>Drill core coarse duplicates are sent to an external laboratory, PT Intertek Utama Services, at an incidence of 1 in 25 samples.</li> <li>Regular QAQC data reviews have established sample assay accuracy and a lack of bias.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>Significant intersections were reviewed by senior exploration geology managers from PTNM and by Kingsrose Mining Limited ("KRM") personnel.</li> <li>Twinned holes have not been used to date.</li> <li>Data is manually checked by PTNM staff geologists prior to input into excel for transfer to MS Access and SQL databases. Data is also electronically checked in 3-dimesional software and appropriate exploration/mining validation software. The main SQL back end database is password controlled with access limited to key senior staff only.</li> <li>Hard copies of Diamond core sampling, Soil, Rock chip and channel sampling, log sheets, surveys and assay results are stored on site.</li> <li>No adjustment is made to any assay data.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>Drillhole collars are surveyed using industry standard survey techniques and equipment.</li> <li>Drillholes have been downhole surveyed with digital downhole camera at average 50 metre intervals.</li> <li>Soil, rock chip and channel sample locations were recorded using a handheld GPS. Elevation values were in AHD RL and values recorded within the database. Expected accuracy is + or – 5m for easting, northing and 10m for elevation coordinates.</li> </ul>



Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>Channel samples are georeferenced by the geologist using the assistance of handheld GPS sample collar pickups and where necessary tape measure and bearing.</li> <li>The Universal Transverse Mercator (UTM) system is used. No local grid system is used for exploration data.</li> <li>For general use remote sensing data and airborne radar data with the incorporation of local scale topographic surfaces, collected by the site survey team, is used.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration result data spacing can be highly variable, as little as 5m and up to 100m.</li> <li>Data spacing and distribution is considered sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource estimation and classifications applied.</li> <li>Sampling is based on geological intervals. Compositing is not applied until estimation stage</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>The orientation of the vein system is known, and drilling intercept angles are generally of suitable orientation to the vein system to provide unbiased sampling results.</li> <li>Channel samples are collected perpendicular to the strike of mineralised structures.</li> <li>Rockchip samples are collected from individual points within a mineralised structure.</li> <li>Soil samples are collected on lines across the known mineralised trend to reduce bias.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Samples retrieved from drilling are stored securely in a locked facility patrolled by onsite security. Samples are then logged, cut and stored in numbered sample bags for transported by PTNM employees to the ISO17025 accredited PT. Geoservices Geo-assay Jakarta Laboratory.</li> <li>Samples retrieved from soil, rock chip and channel sampling are stored securely in a locked facility patrolled by onsite security. Samples are logged in the field then stored in numbered sample bags for transported by PTNM employees to the ISO17025 accredited PT. Geoservices Geo-assay Jakarta Laboratory</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>PTNM has worked with various independent consultants to design its drilling and sampling methodologies and continually reviews and improves its processes and procedures</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>Tenure is occasioned via a fourth generation Contract of Work (CoW) held by PTNM. PTNM is 85 per cent owned by KRM with the remaining 15 per cent interest held by an Indonesian national. The mine, mill and camp area were established within a mixed agricultural and protected forest setting. With the suspension of mining operations the mill has been placed on care and maintenance. Standard Indonesian divestment provisions exist against the COW. KRM is obliged to pay royalties to various parties on its production, including government royalties of 3.75 per cent and 3.25 per cent of gold and silver bullion values, respectively. The corporate structure, divestment provisions and royalty obligation are described in detail in the company's annual report.</li> <li>The COW is currently valid till 2034, with an option to apply for two extension periods of ten years each, subject to meeting certain requirements under the mining law. The mine was recently operating. The mill was recently operating. Community relations are cordial. There are no known impediments to continued operation.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>All exploration at the Way Linggo Project has been completed by PTNM.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The Way Linggo project lies in the trans Sumatran fault fore-arc to intra-arc and is classified as low sulphidation epithermal quartz vein gold and silver deposits.</li> <li>The Maul Vein is a &gt;550 metre long zone of two sub-parallel low sulphidation epithermal, fault hosted vein zones. Each vein varies between 1 and 5 metres apparent thickness, striking WNW-ESE and dipping between 60° and 75° NE. The two veins (Maul and Semung Besar) are approximately 25 metres apart. Drilling has shown the veins extend to at least 200 metres below surface and are open in all directions.</li> <li>Veins are composed of chalcedonic, banded and brecciated quartz in the near surface levels, with weak ginguero banding and a greater proportion of crystalline banded quartz observed in deeper intercepts.</li> <li>Host rocks comprise andesitic volcanics, which are partially unconformably overlain by late, post mineral colluvial and alluvial material which completely obscures the Semung Besar vein.</li> <li>Moderate chlorite, silica, clay and hematite alteration occurs as a selvage to the mineralised veins.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:               <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>See Tables 1 and 2, and Appendix 2 of the news release</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Gold and silver grades for reported intervals summarised in Table 1 are calculated by interval length weighted averaging.</li> <li>Metal Equivalent grades are not stated.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>Intervals reported here are downhole lengths. True widths are not known.</li> <li>The geometry of the Maul Vein system is known and drill hole are oriented approximately perpendicular to the strike of the mineralised system</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>Included as figures 1 to 3 within the news release.</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be</li> </ul>	<ul style="list-style-type: none"> <li>See Table 1 and Appendix 2</li> </ul>

Criteria	JORC Code explanation	Commentary
	practiced to avoid misleading reporting of Exploration Results.	
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>No other exploration information is being presented in this release.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>The Company is seeking divestment opportunities for Way Linggo and this recent exploration success highlights the potential of the project area. The Company shall keep the market informed of any developments with respect to this process in due course in accordance with its continuous disclosure obligations</li> <li>Diagrams showing open areas are shown in Figures 2 and 3.</li> </ul>



## Appendix 2 – Drilling Data

### Maul Vein Assay Data

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-600	29.5	30.5	1.0	DC185789	0.01	-0.5
DDH-600	30.5	31.5	1.0	DC185790	0.02	-0.5
DDH-600	31.5	32.5	1.0	DC185791	0.03	-0.5
DDH-600	32.5	33.1	0.6	DC185792	0.02	-0.5
DDH-600	33.1	34.1	1.0	DC185793	0.02	-0.5
DDH-600	34.1	35.1	1.0	DC185794	0.02	-0.5
DDH-600	35.1	36.0	0.9	DC185795	-0.01	-0.5
DDH-600	36.0	37.0	1.0	DC185796	-0.01	-0.5
DDH-600	37.0	38.0	1.0	DC185797	0.01	-0.5
DDH-600	221.1	222.1	1.0	DC185798	-0.01	0.5
DDH-600	222.1	223.1	1.0	DC185799	-0.01	-0.5
DDH-600	223.1	224.1	1.0	DC185800	0.03	-0.5
DDH-600	224.1	225.0	1.0	DC185801	0.02	-0.5
DDH-600	225.0	226.0	1.0	DC185802	-0.01	-0.5
DDH-600	226.0	227.0	1.0	DC185803	-0.01	-0.5
DDH-600	227.0	228.0	1.0	DC185804	0.04	-0.5
DDH-600	228.0	229.0	1.0	DC185805	0.02	-0.5
DDH-600	229.0	230.0	1.0	DC185806	0.02	-0.5
DDH-600	230.0	231.0	1.0	DC185807	0.01	-0.5
DDH-600	231.0	232.0	1.0	DC185808	-0.01	-0.5
DDH-600	232.0	233.0	1.0	DC185809	0.05	-0.5
DDH-600	233.0	234.0	1.0	DC185810	0.02	-0.5
DDH-600	234.0	235.0	1.0	DC185811	0.02	-0.5
DDH-600	235.0	236.0	1.0	DC185812	0.02	-0.5
DDH-600	236.0	237.0	1.0	DC185813	0.02	-0.5
DDH-600	237.0	238.0	1.0	DC185814	0.02	-0.5
DDH-600	238.0	239.0	1.0	DC185815	0.02	-0.5
DDH-600	239.0	240.0	1.0	DC185816	-0.01	-0.5
DDH-600	240.0	241.0	1.0	DC185817	-0.01	-0.5
DDH-600	241.0	242.0	1.0	DC185818	-0.01	-0.5
DDH-600	242.0	243.0	1.0	DC185819	0.03	-0.5
DDH-600	243.0	244.0	1.0	DC185820	0.02	-0.5
DDH-600	244.0	245.0	1.0	DC185821	0.03	-0.5
DDH-600	245.0	246.0	1.0	DC185822	0.01	-0.5

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-600	246.0	247.0	1.0	DC185823	0.01	-0.5
DDH-600	247.0	248.0	1.0	DC185824	0.04	-0.5
DDH-600	248.0	249.0	1.0	DC185825	0.01	0.5
DDH-600	249.0	250.0	1.0	DC185826	0.09	0.9
DDH-600	250.0	251.0	1.0	DC185827	0.03	-0.5
DDH-600	251.0	252.0	1.0	DC185828	0.02	1.0
DDH-600	252.0	253.0	1.0	DC185829	-0.01	-0.5
DDH-600	253.0	254.0	1.0	DC185830	0.18	-0.5
DDH-600	254.0	255.0	1.0	DC185831	0.05	0.6
DDH-600	255.0	256.0	1.0	DC185832	-0.01	-0.5
DDH-600	256.0	257.0	1.0	DC185833	0.01	1.1
DDH-600	257.0	258.0	1.0	DC185834	-0.01	0.6
DDH-600	258.0	258.7	0.7	DC185835	0.04	2.8
DDH-600	258.7	259.1	0.4	DC185836	0.13	6.0
DDH-600	259.1	259.4	0.3	DC185837	0.06	0.6
DDH-600	259.4	259.9	0.5	DC185838	0.08	0.8
DDH-600	259.9	260.4	0.6	DC185839	0.06	-0.5
DDH-600	260.4	261.3	0.9	DC185840	5.21	7.1
DDH-600	261.3	262.0	0.8	DC185841	0.07	3.0
DDH-600	262.0	263.0	1.0	DC185842	0.08	3.4
DDH-600	263.0	264.0	1.0	DC185843	0.06	3.0
DDH-600	264.0	265.0	1.0	DC185844	0.03	0.7
DDH-600	265.0	266.0	1.0	DC185845	0.02	0.6
DDH-600	266.0	267.0	1.0	DC185846	0.03	0.7
DDH-600	267.0	268.0	1.0	DC185847	0.08	5.2
DDH-600	268.0	269.0	1.0	DC185848	0.03	0.9
DDH-600	269.0	270.0	1.0	DC185849	0.03	0.6
DDH-600	270.0	271.0	1.0	DC185850	0.02	-0.5
DDH-600	271.0	272.0	1.0	DC185851	0.03	-0.5
DDH-600	272.0	273.0	1.0	DC185852	0.03	0.5
DDH-600	273.0	274.0	1.0	DC185853	0.03	0.6
DDH-600	274.0	274.9	0.9	DC185854	0.08	1.0
DDH-600	274.9	275.1	0.2	DC185855	0.08	0.8
DDH-600	275.1	276.1	1.0	DC185856	-0.01	0.6
DDH-600	276.1	277.1	1.0	DC185857	0.09	4.1
DDH-600	277.1	277.9	0.8	DC185858	0.21	0.9
DDH-600	277.9	278.6	0.7	DC185859	0.13	0.7
DDH-600	278.6	279.1	0.5	DC185860	0.17	1.0

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-600	279.1	279.6	0.5	DC185861	0.17	3.4
DDH-600	279.6	280.0	0.5	DC185862	0.05	3.6
DDH-600	280.0	280.4	0.4	DC185863	0.04	2.1
DDH-600	280.4	281.4	1.0	DC185864	0.06	1.5
DDH-600	281.4	281.7	0.4	DC185865	0.02	0.8
DDH-600	281.7	282.0	0.3	DC185866	0.04	1.3
DDH-600	282.0	283.0	1.0	DC185867	-0.01	0.5
DDH-600	283.0	283.5	0.5	DC185868	0.01	-0.5
DDH-600	283.5	284.3	0.8	DC185869	0.01	-0.5
DDH-600	284.3	284.5	0.2	DC185870	0.02	-0.5
DDH-600	284.5	285.5	1.0	DC185871	0.01	-0.5
DDH-600	285.5	286.5	1.0	DC185872	0.02	0.7
DDH-600	286.5	287.5	1.0	DC185873	0.02	1.6
DDH-600	287.5	288.5	1.0	DC185874	-0.01	-0.5
DDH-600	288.5	289.1	0.7	DC185875	-0.01	-0.5
DDH-600	289.1	289.3	0.2	DC185876	0.09	0.5
DDH-600	289.3	290.3	1.0	DC185877	0.04	3.5
DDH-600	290.3	291.3	1.0	DC185878	-0.01	0.6
DDH-600	291.3	292.3	1.0	DC185879	-0.01	-0.5
DDH-600	292.3	293.3	1.0	DC185880	-0.01	-0.5
DDH-600	293.3	294.3	1.0	DC185881	-0.01	-0.5
DDH-600	294.3	295.3	1.0	DC185882	-0.01	-0.5
DDH-600	295.3	296.3	1.0	DC185883	0.04	0.7
DDH-600	296.3	297.3	1.0	DC185884	-0.01	0.5
DDH-600	297.3	298.3	1.0	DC185885	-0.01	-0.5
DDH-600	313.9	314.9	1.0	DC185886	-0.01	-0.5
DDH-600	314.9	315.1	0.2	DC185887	0.10	0.6
DDH-600	315.1	316.1	1.0	DC185888	0.03	-0.5
DDH-600	316.1	317.1	1.0	DC185889	0.03	0.5
DDH-600	322.7	323.7	1.0	DC185890	-0.01	-0.5
DDH-600	323.7	323.9	0.3	DC185891	0.08	0.7
DDH-600	323.9	324.2	0.3	DC185892	0.62	0.6
DDH-600	324.2	324.4	0.2	DC185893	1.70	0.8
DDH-600	324.4	325.4	1.0	DC185894	0.08	1.2
DDH-600	325.4	326.4	1.0	DC185895	0.16	0.5
DDH-600	326.4	327.4	1.0	DC185896	0.32	0.7
DDH-600	327.4	327.8	0.4	DC185897	0.06	0.5
DDH-600	327.8	328.1	0.3	DC185898	0.56	0.5

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-600	328.1	329.1	1.0	DC185899	0.27	0.7
DDH-600	329.1	330.1	1.0	DC185900	0.19	0.5
DDH-600	330.1	331.1	1.0	DC185901	0.06	0.8
DDH-600	331.1	332.1	1.0	DC185902	-0.01	-0.5
DDH-600	332.1	333.1	1.0	DC185903	-0.01	-0.5
DDH-600	333.1	334.1	1.0	DC185904	-0.01	-0.5
DDH-600	334.1	335.1	1.0	DC185905	-0.01	-0.5
DDH-600	342.9	343.9	1.0	DC185906	0.20	0.6
DDH-600	355.9	356.9	1.0	DC185907	-0.01	-0.5
DDH-600	356.9	357.2	0.3	DC185908	0.19	1.2
DDH-600	357.2	358.2	1.0	DC185909	-0.01	-0.5
DDH-601	76.0	77.0	1.0	DC185910	-0.01	-0.5
DDH-601	77.0	78.0	1.0	DC185911	-0.01	6.6
DDH-601	78.0	79.0	1.0	DC185912	-0.01	-0.5
DDH-601	79.0	80.0	1.0	DC185913	-0.01	-0.5
DDH-601	89.6	90.6	1.0	DC185914	-0.01	-0.5
DDH-601	90.6	91.6	1.0	DC185915	0.01	0.6
DDH-601	91.6	92.6	1.0	DC185916	0.02	0.5
DDH-601	92.6	92.9	0.3	DC185917	-0.01	-0.5
DDH-601	92.9	93.3	0.4	DC185918	-0.01	-0.5
DDH-601	93.3	94.3	1.0	DC185919	-0.01	0.5
DDH-601	94.3	95.2	0.9	DC185920	-0.01	-0.5
DDH-601	95.2	95.4	0.3	DC185921	0.06	0.7
DDH-601	95.4	95.7	0.3	DC185922	0.14	0.6
DDH-601	95.7	96.7	1.0	DC185923	0.04	0.5
DDH-601	96.7	97.6	0.9	DC185924	0.01	0.6
DDH-601	97.6	97.9	0.3	DC185925	13.19	60.0
DDH-601	97.9	98.3	0.4	DC185926	2.98	26.0
DDH-601	98.3	98.7	0.4	DC185927	0.34	4.7
DDH-601	98.7	99.7	1.0	DC185928	0.03	-0.5
DDH-601	99.7	99.9	0.3	DC185929	0.97	7.1
DDH-601	99.9	100.1	0.2	DC185930	1.02	6.9
DDH-601	100.1	100.5	0.4	DC185931	9.73	32.3
DDH-601	100.5	100.8	0.3	DC185932	10.55	69.0
DDH-601	100.8	101.2	0.4	DC185933	9.62	51.0
DDH-601	101.2	101.8	0.6	DC185934	0.14	1.5
DDH-601	101.8	102.0	0.2	DC185935	6.39	40.9
DDH-601	102.0	102.2	0.2	DC185936	9.03	42.0



Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-601	102.2	102.6	0.4	DC185937	2.09	11.7
DDH-601	102.6	103.0	0.4	DC185938	0.13	6.3
DDH-601	103.0	103.2	0.2	DC185939	0.15	1.5
DDH-601	103.2	103.7	0.5	DC185940	0.19	0.9
DDH-601	103.7	104.1	0.4	DC185941	0.72	2.9
DDH-601	104.1	104.4	0.3	DC185942	0.02	1.0
DDH-601	104.4	104.8	0.4	DC185943	0.10	6.3
DDH-601	104.8	105.8	1.0	DC185944	0.05	0.8
DDH-601	105.8	106.8	1.0	DC185945	0.06	0.5
DDH-601	106.8	107.8	1.0	DC185946	0.03	0.5
DDH-601	107.8	108.8	1.0	DC185947	0.06	1.0
DDH-601	108.8	109.8	1.0	DC185948	0.02	1.0
DDH-601	109.8	110.8	1.0	DC185949	-0.01	0.5
DDH-601	110.8	111.4	0.6	DC185950	-0.01	-0.5
DDH-601	111.4	111.9	0.5	DC186501	0.15	2.1
DDH-601	111.9	112.9	1.0	DC186502	0.04	0.9
DDH-601	112.9	113.9	1.0	DC186503	0.07	2.0
DDH-601	113.9	114.2	0.4	DC186504	0.83	20.6
DDH-601	114.2	114.7	0.5	DC186505	0.43	6.8
DDH-601	114.7	115.1	0.5	DC186506	0.20	3.5
DDH-601	115.1	115.4	0.3	DC186507	0.08	6.9
DDH-601	115.4	115.9	0.5	DC186508	0.08	3.9
DDH-601	115.9	116.3	0.4	DC186509	0.08	2.9
DDH-601	116.3	116.5	0.3	DC186510	0.11	4.5
DDH-601	116.5	117.1	0.6	DC186511	0.11	2.5
DDH-601	117.1	117.8	0.7	DC186512	0.34	2.8
DDH-601	117.8	118.8	1.0	DC186513	0.14	1.2
DDH-601	118.8	119.8	1.0	DC186514	0.03	-0.5
DDH-601	119.8	120.8	1.0	DC186515	0.04	-0.5
DDH-601	120.8	121.8	1.0	DC186516	0.06	1.3
DDH-601	121.8	122.8	1.0	DC186517	0.30	2.3
DDH-601	122.8	123.8	1.0	DC186518	0.04	1.6
DDH-601	123.8	124.6	0.9	DC186519	0.03	2.8
DDH-601	124.6	124.9	0.3	DC186520	0.09	5.7
DDH-601	124.9	125.4	0.5	DC186521	0.45	19.5
DDH-601	125.4	125.7	0.3	DC186522	0.44	18.4
DDH-601	125.7	126.2	0.6	DC186523	0.19	5.3
DDH-601	126.2	126.6	0.4	DC186524	1.63	20.5

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-601	126.6	127.3	0.8	DC186525	0.10	1.6
DDH-601	127.3	127.6	0.3	DC186526	0.13	2.2
DDH-601	127.6	127.9	0.3	DC186527	0.04	0.7
DDH-601	127.9	128.8	0.9	DC186528	0.06	1.1
DDH-601	128.8	129.8	1.0	DC186529	0.05	0.9
DDH-601	129.8	130.1	0.3	DC186530	0.08	2.8
DDH-601	130.1	130.5	0.4	DC186531	0.52	6.0
DDH-601	130.5	131.0	0.6	DC186532	0.89	11.5
DDH-601	131.0	132.0	1.0	DC186533	0.26	2.1
DDH-601	132.0	132.7	0.7	DC186534	0.05	-0.5
DDH-601	132.7	133.2	0.5	DC186535	0.07	3.0
DDH-601	133.2	133.6	0.4	DC186536	1.57	6.7
DDH-601	133.6	133.9	0.3	DC186537	0.45	9.5
DDH-601	133.9	134.3	0.4	DC186538	2.41	10.9
DDH-601	134.3	134.8	0.5	DC186539	6.53	20.1
DDH-601	134.8	135.2	0.4	DC186540	2.95	2.9
DDH-601	135.2	135.6	0.4	DC186541	1.06	1.8
DDH-601	135.6	135.9	0.4	DC186542	0.28	0.8
DDH-601	135.9	136.2	0.3	DC186543	0.28	2.9
DDH-601	136.2	136.6	0.4	DC186544	0.62	4.6
DDH-601	136.6	137.1	0.5	DC186545	0.04	0.6
DDH-601	137.1	137.5	0.4	DC186546	0.21	1.2
DDH-601	137.5	137.8	0.3	DC186547	0.28	2.1
DDH-601	137.8	138.1	0.3	DC186548	0.47	2.7
DDH-601	138.1	138.4	0.3	DC186549	0.12	1.8
DDH-601	138.4	138.7	0.3	DC186550	0.05	3.4
DDH-601	138.7	139.0	0.3	DC185001	0.03	1.8
DDH-601	139.0	139.3	0.3	DC185002	0.59	31.6
DDH-601	139.3	139.6	0.3	DC185003	0.58	38.5
DDH-601	139.6	139.8	0.2	DC185004	0.16	26.6
DDH-601	139.8	140.1	0.3	DC185005	0.10	5.9
DDH-601	140.1	140.8	0.7	DC185006	0.04	2.6
DDH-601	140.8	141.1	0.4	DC185007	0.06	2.6
DDH-601	141.1	142.1	1.0	DC185008	0.02	1.0
DDH-601	142.1	143.1	1.0	DC185009	-0.01	-0.5
DDH-601	143.1	144.1	1.0	DC185010	-0.01	0.6
DDH-601	144.1	145.1	1.0	DC185011	-0.01	-0.5
DDH-601	145.1	145.3	0.2	DC185012	-0.01	0.7

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-601	145.3	146.3	1.0	DC185013	-0.01	-0.5
DDH-602	78.0	79.0	1.0	DC185014	-0.01	-0.5
DDH-602	79.0	80.0	1.0	DC185015	-0.01	-0.5
DDH-602	80.0	81.0	1.0	DC185016	-0.01	-0.5
DDH-602	81.0	82.0	1.0	DC185017	-0.01	-0.5
DDH-602	82.0	83.0	1.0	DC185018	-0.01	-0.5
DDH-602	83.0	84.0	1.0	DC185019	0.01	-0.5
DDH-602	86.1	87.1	1.0	DC185020	-0.01	-0.5
DDH-602	87.1	88.1	1.0	DC185021	-0.01	-0.5
DDH-602	93.2	94.2	1.0	DC185022	-0.01	0.7
DDH-602	94.2	95.2	1.0	DC185023	-0.01	0.5
DDH-602	95.2	96.0	0.8	DC185024	-0.01	0.5
DDH-602	96.0	97.0	1.0	DC185025	-0.01	0.5
DDH-602	97.0	98.0	1.0	DC185026	-0.01	0.6
DDH-602	98.0	99.0	1.0	DC185027	-0.01	-0.5
DDH-602	99.0	100.0	1.0	DC185028	0.03	0.8
DDH-602	100.0	101.0	1.0	DC185029	-0.01	-0.5
DDH-602	102.8	103.0	0.3	DC185030	0.02	-0.5
DDH-602	103.0	104.0	1.0	DC185031	-0.01	0.5
DDH-602	104.0	105.0	1.0	DC185032	-0.01	-0.5
DDH-602	105.0	106.0	1.0	DC185033	-0.01	-0.5
DDH-602	110.3	111.3	1.0	DC185034	0.01	0.8
DDH-602	111.3	112.3	1.0	DC185035	0.01	0.6
DDH-602	112.3	113.3	1.0	DC185036	0.03	-0.5
DDH-602	113.3	114.0	0.7	DC185037	0.03	-0.5
DDH-602	114.0	114.7	0.7	DC185038	0.02	0.9
DDH-602	114.7	114.9	0.3	DC185039	0.10	7.0
DDH-602	114.9	115.3	0.4	DC185040	0.02	0.5
DDH-602	115.3	115.7	0.4	DC185041	0.18	0.5
DDH-602	115.7	116.7	1.0	DC185042	-0.01	0.5
DDH-602	116.7	117.7	1.0	DC185043	-0.01	0.5
DDH-602	117.7	118.7	1.0	DC185044	-0.01	-0.5
DDH-602	118.7	119.7	1.0	DC185045	-0.01	-0.5
DDH-602	122.0	123.0	1.0	DC185046	-0.01	0.7
DDH-602	123.0	124.0	1.0	DC185047	-0.01	1.0
DDH-602	127.1	128.0	1.0	DC185048	0.01	-0.5
DDH-602	128.0	129.0	1.0	DC185049	0.02	-0.5
DDH-602	129.0	130.0	1.0	DC185050	0.01	0.6

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-602	130.0	131.0	1.0	DC185051	-0.01	-0.5
DDH-602	131.0	132.0	1.0	DC185052	-0.01	0.6
DDH-602	132.0	133.0	1.0	DC185053	0.02	1.4
DDH-602	133.0	134.0	1.0	DC185054	0.14	2.8
DDH-602	134.0	134.9	0.9	DC185055	0.03	12.3
DDH-602	134.9	135.4	0.5	DC185056	0.19	6.2
DDH-602	135.4	135.7	0.3	DC185057	0.14	1.6
DDH-602	135.7	136.0	0.4	DC185058	0.15	4.8
DDH-602	136.0	136.6	0.6	DC185059	0.09	9.7
DDH-602	136.6	137.0	0.4	DC185060	0.51	8.8
DDH-602	137.0	137.4	0.4	DC185061	0.36	9.8
DDH-602	137.4	137.9	0.5	DC185062	7.64	77.0
DDH-602	137.9	138.2	0.3	DC185063	1.56	41.4
DDH-602	138.2	138.6	0.4	DC185064	0.94	22.4
DDH-602	138.6	139.0	0.4	DC185065	0.12	15.8
DDH-602	139.0	139.4	0.5	DC185066	0.05	1.5
DDH-602	139.4	140.0	0.6	DC185067	0.92	25.9
DDH-602	140.0	140.3	0.3	DC185068	5.84	23.2
DDH-602	140.3	140.9	0.6	DC185069	8.59	249.0
DDH-602	140.9	141.4	0.6	DC185070	2.18	39.5
DDH-602	141.4	142.0	0.6	DC185071	3.75	40.2
DDH-602	142.0	142.6	0.6	DC185072	0.89	11.9
DDH-602	142.6	143.0	0.4	DC185073	1.04	15.1
DDH-602	143.0	143.3	0.3	DC185074	2.36	17.1
DDH-602	143.3	143.9	0.6	DC185075	4.76	31.7
DDH-602	143.9	144.2	0.3	DC185076	16.95	86.0
DDH-602	144.2	144.5	0.3	DC185077	32.45	145.0
DDH-602	144.5	144.9	0.4	DC185078	6.52	34.8
DDH-602	144.9	145.2	0.3	DC185079	0.83	14.3
DDH-602	145.2	145.5	0.3	DC185080	9.34	37.4
DDH-602	145.5	145.8	0.3	DC185081	4.20	23.3
DDH-602	145.8	146.2	0.4	DC185082	2.37	43.3
DDH-602	146.2	146.6	0.4	DC185083	0.37	16.5
DDH-602	146.6	147.3	0.7	DC185084	0.23	7.9
DDH-602	147.3	148.1	0.8	DC185085	0.68	11.1
DDH-602	148.1	148.4	0.3	DC185086	2.21	10.2
DDH-602	148.4	149.1	0.7	DC185087	4.78	12.0
DDH-602	149.1	149.5	0.4	DC185088	0.64	10.3



Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-602	149.5	150.1	0.6	DC185089	0.06	6.2
DDH-602	150.1	150.4	0.3	DC185090	0.05	11.1
DDH-602	150.4	150.7	0.3	DC185091	0.07	7.8
DDH-602	150.7	151.4	0.7	DC185092	-0.01	0.5
DDH-602	151.4	152.4	1.0	DC185093	-0.01	0.5
DDH-603	23.0	24.0	1.0	DC185094	-0.01	0.4
DDH-603	24.0	25.0	1.0	DC185095	-0.01	0.2
DDH-603	25.0	26.0	1.0	DC185096	-0.01	0.3
DDH-603	26.0	27.0	1.0	DC185097	-0.01	0.2
DDH-603	27.0	28.0	1.0	DC185098	-0.01	0.3
DDH-603	35.0	36.0	1.0	DC185099	-0.01	0.3
DDH-603	36.0	37.0	1.0	DC185100	-0.01	0.4
DDH-603	37.0	38.0	1.0	DC185101	-0.01	0.3
DDH-603	38.0	39.0	1.0	DC185102	-0.01	0.5
DDH-603	39.0	40.0	1.0	DC185103	-0.01	0.6
DDH-603	40.0	41.0	1.0	DC185104	-0.01	0.5
DDH-603	41.0	41.8	0.8	DC185105	0.03	1.1
DDH-603	41.8	42.8	1.0	DC185106	-0.01	0.6
DDH-603	42.8	43.8	1.0	DC185107	0.01	0.5
DDH-603	43.8	44.8	1.0	DC185108	0.02	0.6
DDH-603	55.8	56.8	1.0	DC185109	0.03	0.5
DDH-603	56.8	57.8	1.0	DC185110	0.01	0.5
DDH-603	57.8	58.8	1.0	DC185111	-0.01	0.5
DDH-603	58.8	59.8	1.0	DC185112	0.02	0.7
DDH-603	59.8	60.8	1.0	DC185113	-0.01	0.6
DDH-603	60.8	61.3	0.5	DC185114	0.02	2.2
DDH-603	61.3	62.3	1.0	DC185115	0.01	0.7
DDH-603	62.3	63.0	0.7	DC185116	-0.01	0.5
DDH-603	63.0	63.8	0.8	DC185117	0.02	0.6
DDH-603	63.8	64.6	0.8	DC185118	0.03	0.7
DDH-603	64.6	65.4	0.8	DC185119	-0.01	0.6
DDH-603	65.4	66.4	1.0	DC185120	-0.01	-0.2
DDH-603	66.4	67.4	1.0	DC185121	-0.01	0.5
DDH-603	67.4	68.4	1.0	DC185122	-0.01	0.5
DDH-603	68.4	69.4	1.0	DC185123	-0.01	0.3
DDH-603	69.4	70.4	1.0	DC185124	-0.01	0.4
DDH-603	70.4	71.1	0.7	DC185125	-0.01	0.6
DDH-603	71.1	72.0	0.9	DC185126	-0.01	0.5

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-603	72.0	73.0	1.0	DC185127	-0.01	0.6
DDH-603	73.0	73.9	0.9	DC185128	0.02	0.5
DDH-603	73.9	74.9	1.0	DC185129	0.02	0.7
DDH-603	74.9	75.9	1.0	DC185130	0.02	0.5
DDH-603	75.9	76.2	0.3	DC185131	-0.01	2.6
DDH-603	76.2	77.2	1.0	DC185132	0.09	0.3
DDH-603	77.2	78.2	1.0	DC185133	0.03	0.5
DDH-603	78.2	79.1	0.9	DC185134	-0.01	0.7
DDH-603	79.1	80.1	1.0	DC185135	-0.01	0.6
DDH-603	80.1	80.9	0.8	DC185136	-0.01	0.4
DDH-603	80.9	81.9	1.0	DC185137	0.02	0.5
DDH-603	81.9	82.8	0.9	DC185138	-0.01	1.0
DDH-603	82.8	83.4	0.6	DC185139	0.02	1.7
DDH-603	83.4	83.7	0.3	DC185140	0.02	1.5
DDH-603	83.7	84.3	0.6	DC185141	0.49	11.6
DDH-603	84.3	85.2	0.9	DC185142	0.04	0.5
DDH-603	85.2	85.7	0.6	DC185143	0.06	0.4
DDH-603	85.7	86.3	0.6	DC185144	0.02	1.2
DDH-603	86.3	87.3	1.0	DC185145	0.04	0.8
DDH-603	87.3	88.3	1.0	DC185146	0.08	0.8
DDH-603	88.3	88.9	0.6	DC185147	0.02	1.0
DDH-603	88.9	89.5	0.6	DC185148	0.21	13.9
DDH-603	89.5	89.7	0.2	DC185149	0.44	25.8
DDH-603	89.7	90.6	1.0	DC185150	0.16	9.7
DDH-603	90.6	91.6	1.0	DC185151	0.09	5.8
DDH-603	91.6	92.6	1.0	DC185152	0.09	2.5
DDH-603	92.6	93.6	1.0	DC185153	0.02	0.4
DDH-603	93.6	94.6	1.0	DC185154	0.02	0.8
DDH-603	94.6	95.6	1.0	DC185155	0.08	0.9
DDH-603	95.6	96.6	1.0	DC185156	0.04	0.8
DDH-603	96.6	97.4	0.8	DC185157	0.01	1.3
DDH-603	97.4	97.7	0.3	DC185158	3.37	9.7
DDH-603	97.7	98.4	0.8	DC185159	0.29	15.5
DDH-603	98.4	98.8	0.4	DC185160	6.43	24.5
DDH-603	98.8	99.2	0.4	DC185161	0.80	8.2
DDH-603	99.2	99.6	0.4	DC185162	10.20	23.6
DDH-603	99.6	99.8	0.2	DC185163	6.97	12.7
DDH-603	99.8	100.2	0.4	DC185164	7.03	31.0

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-603	100.2	100.7	0.5	DC185165	5.07	18.0
DDH-603	100.7	101.2	0.5	DC185166	7.49	15.7
DDH-603	101.2	101.5	0.3	DC185167	1.50	7.7
DDH-603	101.5	102.1	0.6	DC185168	0.23	9.7
DDH-603	102.1	102.7	0.6	DC185169	0.52	5.7
DDH-603	102.7	103.2	0.5	DC185170	0.09	5.1
DDH-603	103.2	103.6	0.4	DC185171	0.06	2.6
DDH-603	103.6	104.3	0.7	DC185172	0.02	0.9
DDH-603	104.3	105.0	0.7	DC185173	0.10	11.3
DDH-603	105.0	105.6	0.6	DC185174	0.02	2.7
DDH-603	105.6	106.1	0.5	DC185175	0.03	1.2
DDH-603	106.1	106.8	0.7	DC185176	0.06	2.2
DDH-603	106.8	107.8	1.0	DC185177	-0.01	0.3
DDH-603	107.8	108.8	1.0	DC185178	-0.01	0.3
DDH-603	108.8	109.8	1.0	DC185179	-0.01	0.4
DDH-604	44.6	45.6	1.0	DC185180	0.02	0.6
DDH-604	45.6	46.6	1.0	DC185181	0.70	0.6
DDH-604	46.6	47.6	1.0	DC185182	0.96	0.4
DDH-604	47.6	48.6	1.0	DC185183	1.39	0.6
DDH-604	48.6	49.6	1.0	DC185184	1.19	0.5
DDH-604	49.6	50.6	1.0	DC185185	0.23	0.4
DDH-604	50.6	51.6	1.0	DC185186	0.14	0.3
DDH-604	51.6	52.6	1.0	DC185187	0.14	0.2
DDH-604	52.6	53.2	0.6	DC185188	0.07	0.3
DDH-604	53.2	53.5	0.4	DC185189	0.06	0.4
DDH-604	53.5	53.8	0.3	DC185190	0.04	-0.2
DDH-604	53.8	54.3	0.6	DC185191	8.32	16.6
DDH-604	54.3	54.8	0.5	DC185192	3.16	11.7
DDH-604	54.8	55.1	0.4	DC185193	0.25	3.7
DDH-604	55.1	56.1	1.0	DC185194	0.08	2.3
DDH-604	56.1	56.3	0.2	DC185195	0.05	3.2
DDH-604	56.3	56.8	0.5	DC185196	0.64	2.6
DDH-604	56.8	57.2	0.4	DC185197	0.84	1.4
DDH-604	57.2	57.9	0.7	DC185198	0.61	1.8
DDH-604	57.9	58.2	0.3	DC185199	0.36	1.2
DDH-604	58.2	59.0	0.8	DC185200	7.38	4.8
DDH-604	59.0	59.6	0.6	DC185201	0.28	0.8
DDH-604	59.6	60.3	0.7	DC185202	0.44	0.6

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-604	60.3	61.0	0.7	DC185203	0.47	0.7
DDH-604	61.0	61.9	0.9	DC185204	1.11	1.5
DDH-604	61.9	62.6	0.8	DC185205	1.80	3.0
DDH-604	62.6	63.6	1.0	DC185206	0.10	4.8
DDH-604	63.6	64.6	1.0	DC185207	0.03	0.4
DDH-604	64.6	65.5	0.9	DC185208	0.05	4.7
DDH-604	65.5	65.8	0.3	DC185209	0.12	3.1
DDH-604	65.8	66.1	0.3	DC185210	0.01	4.6
DDH-604	66.1	66.7	0.6	DC185211	0.03	3.5
DDH-604	66.7	67.2	0.6	DC185212	0.01	4.0
DDH-604	67.2	67.7	0.5	DC185213	-0.01	0.3
DDH-604	67.7	68.1	0.5	DC185214	0.02	0.9
DDH-604	68.1	69.1	1.0	DC185215	0.01	0.7
DDH-604	69.1	70.1	1.0	DC185216	-0.01	0.3
DDH-604	70.1	71.1	1.0	DC185217	-0.01	0.2
DDH-604	78.9	79.9	1.0	DC185218	-0.01	0.7
DDH-604	79.9	80.4	0.5	DC185219	-0.01	0.4
DDH-604	80.4	81.3	0.9	DC185220	-0.01	0.2
DDH-604	81.3	82.1	0.8	DC185221	-0.01	0.9
DDH-604	82.1	83.1	1.0	DC185222	-0.01	0.3
DDH-604	83.1	84.1	1.0	DC185223	-0.01	0.2
DDH-604	84.1	85.1	1.0	DC185224	-0.01	0.4
DDH-604	85.1	85.8	0.7	DC185225	-0.01	0.9
DDH-604	85.8	86.6	0.8	DC185226	-0.01	0.3
DDH-604	86.6	87.6	1.0	DC185227	-0.01	0.2
DDH-604	87.6	88.6	1.0	DC185228	-0.01	0.4
DDH-604	88.6	89.6	1.0	DC185229	-0.01	0.2
DDH-604	89.6	90.2	0.6	DC185230	0.03	0.4
DDH-604	90.2	90.8	0.6	DC185231	0.05	1.0
DDH-604	90.8	91.3	0.6	DC185232	0.03	3.7
DDH-604	91.3	92.0	0.7	DC185233	0.02	0.8
DDH-604	92.0	92.7	0.7	DC185234	0.01	0.4
DDH-604	92.7	93.0	0.3	DC185235	0.01	0.8
DDH-604	93.0	93.3	0.4	DC185236	0.02	1.3
DDH-604	93.3	93.5	0.2	DC185237	0.12	3.6
DDH-604	93.5	94.0	0.5	DC185238	0.03	1.8
DDH-604	94.0	95.0	1.0	DC185239	0.04	0.9
DDH-604	95.0	96.0	1.0	DC185240	0.05	0.5

Hole ID	Down-Hole From (m)	Down-Hole To (m)	Down-Hole Interval (m)	Sample ID	Au g/t (uncut)	Ag g/t (uncut)
DDH-604	96.0	97.0	1.0	DC185241	0.01	0.2